

This discussion paper is/has been under review for the journal Ocean Science (OS).
Please refer to the corresponding final paper in OS if available.

Effect of tidal stream power generation on the region-wide circulation in a shallow sea

G. I. Shapiro

University of Plymouth, Drake Circus, Plymouth, PL4 8AA, UK

Received: 1 October 2010 – Accepted: 9 October 2010 – Published: 21 October 2010

Correspondence to: G. I. Shapiro (gshapiro@plymouth.ac.uk)

Published by Copernicus Publications on behalf of the European Geosciences Union.

OSD

7, 1785–1810, 2010

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

Ocean tides are deemed to become a stable source of renewable energy for the future. Tidal energy has two components, the first is the potential energy due to sea level variations and the second comes from the kinetic energy of the tidal streams. This paper is concerned with the backward effect on the ocean currents by a tidal stream farm located in the open shallow sea. Recent studies in channels with 1-D models have indicated that the power potential is not given purely by the flux of kinetic energy, as has been commonly assumed. In this study, a 3-D ocean circulation model is used to estimate (i) maximum extractable energy at different levels of rated generation capacity of the farm, (ii) changes in the strength of currents due to energy extraction, and (iii) alterations in the pattern of residual currents and pathways of passive tracers. As water flow is influenced both by tidal and non-tidal currents, the model takes into account wind-driven and density-driven currents generated by meteorological forcing. Numerical modelling has been carried out for a hypothetical circular farm located in the Celtic Sea north of Cornwall, an area known for its high level of tidal energy. Modelling results clearly indicate that extracted power does not grow linearly with the increase in the rated capacity of the farm. For the case studies covered in this paper, a 100-fold increase in rated generation capacity of the farm results only in 7-fold increase in extracted power, this loss of efficiency is much greater than was estimated earlier with 1-D models. In case of high rated capacity of the farm, kinetic energy of currents is altered significantly as far as 10–20 km away from the farm. At high levels of extracted energy the currents tend to avoid flowing through the farm, an effect which is not captured with 1-D models. Residual currents are altered as far as a hundred kilometres. The magnitude of changes in the dispersion of tracers is highly sensitive to the location. For the drifters analysed in this study, variations in the end-to-start distance due to energy extraction range from 13% to 238%.

OSD

7, 1785–1810, 2010

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1 Introduction

Ocean tides are driven by the Earth's rotation in combination with gravitational forces from the Sun and the Moon. As such, tidal energy is almost inexhaustible despite the gradual reduction of kinetic energy of the Earth's rotation due to dissipation of tidal currents via friction and turbulence. This process is very slow, during the last 620 million years the Earth has lost only 17% of its rotational energy (Williams, 2000). The Energy White Paper (DTI, 2003) states that in order to meet its climate change targets, the UK would need to produce by 2050 at least 30% to 40% of electricity generation from renewables. Some of the large renewable power stations of the future will be offshore marine plants, including wave, tidal and windfarms.

World ocean resource of tidal energy is estimated at 800 TWh/year (Soerensen and Weinstein, 2008.). Whilst it is only a small fraction of the world consumption of electricity – 19 771 TWh/year in 2007, see (IEA, 2009), tidal power is an important source of renewable energy for the UK and those European countries which are exposed to high levels of tidal energy fluxes from the ocean. Despite its relatively high cost, generation of electricity from tidal energy is deemed to become a stable source of renewable energy for the future.

Tidal energy has two components, the first is the potential energy due to sea level variations, and the second comes from the kinetic energy of the tidal streams. It is the potential energy of the tides which is commonly used for electricity generation. As of August 2010, there are 6 commercially operational tidal power plants: La Rance, France (240 MW capacity, built in 1966); Kislaya Guba Bay, Russia (1.7 MW, 1968); Jiangxia, China (3.2 MW, 1980); Annapolis, Canada (20 MW, 1985); Strangford Lough, Northern Ireland (1.2 MW, 2008); Uldolmok, South Korea (1.0 MW, 2009) – see List of largest power stations in the world (2010) for more details. Five out of six plants use barrages or dams to create a difference in water level, while the Strangford Lough device, which uses twin 16 m diameter rotors (Marine Current turbines, 2010) is the only commercial scale tidal stream power generator.

OSD

7, 1785–1810, 2010

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Engineering aspects and potential environmental impacts of tidal barrages, which use the potential energy of the tide, have been given a thorough consideration; see e.g. (Xia et al, 2010; DE, 1989; SDC, 2007). By comparison, our knowledge of how tidal stream devices interact with the marine environment is limited. A tidal stream device is typically a submerged underwater turbine used for harnessing energy from ocean currents. A group of such turbines distributed in a site is called a tidal stream farm which is similar to a wind farm (Li et al., 2009). Recent research has shown that tidal stream devices located in channels can significantly decrease velocities of the water flow even though the velocity through the device itself may increase. Total energy available for harnessing is then reduced by the presence of the turbines, so that commonly used formula for the maximum available power does not give a true estimate of the practically extractable energy (Garrett and Cummins, 2008; Bryden and Couch, 2006; Mueller and Wallace, 2008.). On the oceanic shelf, studies of distortion of ocean currents by tidal stream devices and the environmental impact of such alterations are extremely sparse (Neill et al., 2009). Little is known about region-wide impacts of ocean energy extraction, and how far away from the actual device they can be seen. These issues have still to be explored and have motivated the present study.

This paper uses a 3-D ocean circulation model (i) to assess alterations to the circulation pattern in the shelf sea by a hypothetical tidal stream energy farm, (ii) estimate how these alterations impact on the availability of extractable ocean energy, and (iii) how the process of energy extraction changes both instantaneous and residual (tidally averaged) water flow in the wider region up to a hundred kilometres away from the farm. It has to be noted that despite being named “tidal energy converters” the tidal stream devices located on the shelf extract energy from the total incoming current which is composed of a tidal stream as well as wind driven and density driven currents. This notion is particularly important in the assessment of alteration to residual currents and the pathways of dispersion of pollutants on the shelf.

Effect of tidal stream power generation

G. I. Shapiro

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[I◀](#)[▶I](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

2 Shelf sea dynamics and harnessing of ocean kinetic energy

It is common sense that if kinetic energy is extracted from the sea then current speeds should be affected as kinetic energy is directly related to the velocity of the current. The kinetic energy, KE, of water mass is its ability to do work by virtue of its motion.

- 5 Kinetic energy per unit volume of a fluid parcel moving with velocity V is

$$KE = \frac{1}{2}\rho V^2, \quad (1)$$

and the energy flux through a “window” of unit area perpendicular to the fluid flow (i.e. vertical in case of ocean currents) is

$$P = KE \cdot V = \frac{1}{2}\rho V^3 \quad (2)$$

- 10 This equation is widely used to assess the “theoretically available” tidal energy resource (e.g. Soerensen and Weinstein, 2008; Walkington and Burrows, 2009; Carballo et al., 2009) without considering reduction of the incoming flow rate due to energy extraction, however such approach has been criticized by Garrett and Cummins (2008).

- 15 The upper limit of extractable tidal stream energy (and generally kinetic energy of currents of any origin) given by Eq. (2) assumes that while passing through the “window” the water flow is subjected to such extreme friction that the current collapses and its speed falls to zero after the passage. Through the law of mass conservation there would be an obvious effect on the speed of the incoming current. As a result, the true “theoretically available” power may be significantly lower than that given by Eq. (2)
- 20 under the assumption that the speed of the incoming flow was not disturbed. One approach to take this feedback into account is to scale down the value given by Eq. (2) by multiplying its right hand side by a prescribed “efficiency coefficient” (Carballo et al., 2009). Another approach was employed in the modelling study of the near-field flow around the tidal turbine by (Walkington and Burrows, 2009). The reduction of vertically
- 25 integrated flow speed was obtained by increasing the bottom drag coefficient within

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the energy farm .The drag coefficient was then determined from the prescribed rated power of the tidal device at a given inflow velocity. This approach may be less appropriate to the study of the cumulative, regional scale effects of the energy plant, where individual devices are not resolved and the turbines are placed in the water column above the bottom frictional layer.

In their study of flow speed reduction due to energy extraction in a channel, Garrett and Cummins (2008) assumed that turbines are deployed in a uniform or a partial fence, or fences, occupying a line across the channel. The authors use a quasi 1-D approach when all parameters are integrated over a transect perpendicular to the current flow. The energy loss per unit time associated with the presence of the turbines is then given by

$$P = \rho Q \int_0^L F_{\text{turb}} dx \quad (3)$$

where ρ is the density of water, Q is the flux of water through the channel, F_{turb} is the cross-sectional average of retarding frictional forces associated with the presence of turbines, x is the distance along the channel, and L is the total length of the channel.

The maximum available power, P_{max} , is given by the equation

$$P_{\text{max}} = 0.38 \rho Q_0 g \zeta_0 \quad (4)$$

where Q_0 is the natural flux (without turbines), and ζ_0 is the difference in sea level elevation at the entrance and exit of the channel This formula gives a helpful estimate of energy extraction in a channel; however it is not applicable in the open ocean setting, where lateral deviations of the current may play a role.

In this paper we examine how a tidal energy farm placed on the open shelf modifies ocean currents using a different approach, namely a 3-D ocean circulation model This approach allows assessing the rate of energy extraction by a geometrically compact (i.e. not of a barrage/fence type) energy farm and its impact on the circulation around the farm. The currents in the shelf sea are subject to various forces: water column

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and bottom friction, wind stress, pressure gradients due to temperature and salinity variations, all of which contribute to the formation of complex 3-D flow patterns even in a tidally dominated sea. The use of a 3-D numerical model allows these patterns to be quantified

The horizontal momentum equation for ocean currents in the presence of tidal stream devices can be written as

$$\frac{\partial \mathbf{u}}{\partial t} = \mathbf{NL} + \mathbf{F} \quad (5)$$

where $\mathbf{u}(x,y,z,t)$ is the vector of horizontal current velocity, \mathbf{NL} represents the standard terms of the nonlinear momentum equation including advection, the Coriolis force, pressure gradient force and natural friction (Pedlosky, 1990), and \mathbf{F} is the flow retarding frictional force per unit mass due to energy extraction. The friction within the water column due to energy extraction can be parameterized in a number of ways. For this analysis, the Rayleigh friction scheme is applied which is often used in meteorology to parameterize the friction within the air flow (Bjorn et al., 2002; Wu et al., 2000). According to this scheme the frictional force, \mathbf{F} , is proportional and opposite in direction to the current velocity, \mathbf{u} ,

$$\mathbf{F} = -\frac{1}{2}\alpha\mathbf{u} \quad (6)$$

where α is the Rayleigh friction coefficient.

By multiplying Eq. (5) by \mathbf{u} one can get that the loss of kinetic energy per unit time and per unit volume due to energy devices and hence the upper limit of power available for conversion to electricity is equal to

$$P = \frac{dKE}{dt} = -\rho\mathbf{Fu} = -\frac{1}{2}\alpha\rho\mathbf{u}^2 = -\alpha KE \quad (7)$$

From Eq. (7) it follows that the loss of energy is proportional to the actual (i.e. modified by the energy farm) kinetic energy of the flow. The form of Eq. (7) integrated over the volume of a numerical gridbox is used for numerical modelling.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Equation (7) shows that energy extraction per unit volume is proportional to u^2 , and hence the efficiency relative to the flux of arriving kinetic energy, which is proportional to u^3 , see Eq. (2), decreases with increasing flow. This conclusion is in agreement with measurements of efficiency of wind turbines of a similar design at varying wind speeds.

Figure 1 shows the power curve for a 1 MW commercial wind turbine manufactured by LM Glasfiber A/S (Stiesdal et al., 1999). Observed values of generated power in the working range 2.5–14 m/s are accurately approximated by the quadratic dependence $P \sim u^2$ with the determination coefficient as high as $R^2 \sim 0.95$

3 The model

The numerical model used in this study is a finite difference 3-D numerical ocean circulation model POLCOMS developed in the Proudman Oceanographic Laboratory (Holt and James, 2001). It has been thoroughly validated for UK waters (Holt et al., 2005; Siddorn et al., 2007; Lewis et al., 2006) and has been used in many research projects and operationally by the MetOffice (without energy extraction terms). The model uses an Arakawa B-grid in the horizontal and terrain following s-coordinate in the vertical. For this study the model was set up for the eastern Celtic Sea including the Bristol Channel (Shapiro et al., 2010); the area known for its high tidal energy level (Huntley, 1980), see Fig. 2. Bottom topography was acquired from ETOPO2 global bathymetry data base (ETOPO2, 2006), initial boundary conditions for temperature and salinity were taken from the climatology presented in the World Ocean Atlas (Boyer et al., 2005), meteorological forcing was obtained from NCEP reanalysis-2 dataset. Tidal boundary conditions for 15 tidal constituents were obtained from a larger scale POLCOMS modelling runs carried out in the Proudman Laboratory (S. Wakelin, personal communication, 2009). For this study, the model was run with 30 vertical levels, and 2 km horizontal resolution. In order to exclude effects of wetting and drying, which are not relevant to the present study, numerical calculations were carried out only in the areas deeper than 10 m. The model code was modified to include additional frictional

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



forces due to energy extraction as detailed in the previous section.

As development of “tidal stream” energy generators is in its infancy, little is known about the details of the future industrial scale energy farm. A hypothetical “tidal stream” energy farm incorporated into numerical model has a circular shape in the horizontal plane, and the energy converters were assumed to be able to capture energy throughout the whole water column, from bottom to the surface. In contrast to the existing commercially operational tidal plants, which are installed in dams or barrages, this hypothetical farm contains an array of underwater turbines distributed over a compact area of the shelf sea.

The values of the Rayleigh friction coefficients (α) averaged over each numerical grid box represent the relative intensity of the kinetic energy loss due to turbines. As the model is concerned with the cumulative action of the energy devices, the box-averaged values of α represent both the number of turbines inside the box and the efficiency of devices; larger values correspond to greater energy losses.

The radial distribution of the Rayleigh coefficient α is given by the Gaussian equation

$$\alpha = \alpha_0 \exp \left\{ - \left[\left(\frac{(\lambda - \lambda_c)}{\lambda_0} \right)^2 + \left(\frac{(\phi - \phi_c)}{\phi_0} \right)^2 \right] \right\}, \quad (8)$$

where α_0 is the maximum value of α , λ_c and λ_0 are the latitudes of the farm centre and its radius, and similar notations are used for the longitude, ϕ .

The eastern Celtic Sea is known for its highly stratified structure and sharp density fronts present during the summer months, these fronts contribute to the formation of density-driven currents which, as well as wind-driven currents, can influence the transport of water mass over periods longer than the tidal cycle. As the numerical model calculates not only the tidal streams but also the total ocean current the results are specific to the time period chosen for modelling, not just to the phases of the tidal cycle.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4 Results and discussion

For this study, a period of relatively calm weather was chosen, namely between 1 June and 2 August 1998, which covered 4 spring-neap cycles. The diameter of the farm as determined by the e-fold decrease in the Rayleigh friction coefficient is 12 km. The runs are carried out for the baseline situation (no farm present) and with 3 different values of the rated power of the farm represented by different values of α_0 :

- (L) $\alpha_{0L} = 10^{-4} \text{ s}^{-1}$;
- (M) $\alpha_{0M} = 10 \cdot \alpha_{0L} \text{ s}^{-1}$;
- (H) $\alpha_{0M} = 100 \cdot \alpha_{0L} \text{ s}^{-1}$.

Comparison of these runs allows to examine relative efficiency of power generation and environmental impact of energy extraction produced by the farm with differing rated power capacity. The values of Rayleigh coefficient are selected to represent a wide range of mean extracted power- from 87 MW to 606 MW, see below. It should be noted that the increase in the Rayleigh coefficient α is proportional to the increase in the rated power of the farm, either due to greater density of turbines within the farm or the increase in the rated power of individual devices. In other words, the cases (L), (M) and (H) correspond respectively to a relatively low energy farm, medium range (having a 10 times greater rated capacity) and a high energy farm with a 100 times greater rated capacity. The terms “low”, “medium” and “large” are used in a relative sense; we shall see that even a “low” energy farm can extract as much as 87 MW on average.

In the Celtic Sea the currents are dominated by the tidal streams, so it is not a surprise that the values of kinetic energy for the dates corresponding to the same phase in the spring-neap cycle are fairly similar even though some springs are stronger than the other. The time series of the kinetic energy per unit volume averaged over the depth and area of the modelling domain is shown in Fig. 3a for the baseline case (i.e. without the energy farm). Temporal variations of kinetic energy when the farm is present have a similar shape.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

AbstractIntroduction

ConclusionsReferences

TablesFigures

I◀▶I

◀▶

BackClose

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The time series of power loss by the currents due to energy farm are shown in Fig. 3b–d. Temporal patterns for all 3 cases are very similar and follow the spring-neap cycle of the ocean current kinetic energy in the region. However there is a significant difference in the magnitude of the extracted power. If the electrical efficiency of the turbines stays the same (or nearly the same) in all cases, i.e. if the amount of electrical power generated is proportional to the amount of energy taken from the sea by the turbines, this would mean significant variations in the electric power output from the farm. Figure 4 shows the time averaged values of the extracted power for the 3 cases, averaging period being from 1 June to 8 July, as well as maximum values of extracted energy over the same period.

Due to the backward effect of the energy extraction on the ocean currents, the increase in the rated power capacity of the farm provides less than linearly proportional increase in the actual extracted power. The mean extracted power from the lowest rated farm “L” is 87 MW, a 10-fold increase in the rated power of the farm (case “M”) gives only 5.5-fold increase in the harnessed energy at 473 MW, and a 100-fold increase of effort (case “H”) provides only 606 MW of mean extracted power, a 7-fold increase in extracted energy as compared to case “L”. Maximum (instantaneous) power levels for the three versions of the farm are 0.3 GW, 1.7 GW and 2 GW respectively. If the extracted power had been proportional to the rated capacity of the farm, then the high energy farm would have harnessed on average a massive 8.7 GW of tidal energy with a peak value of 30 GW. These hypothetical values are unrealistic—the total mean tidal power arriving at the UK is only 110 TWh/year or 12.5 GW (Black and Veatch, 2005). Figure 4 clearly shows that when the level of power generation is high, then the efficiency of energy generation decreases. Power generation grows slower than the effort (e.g. density of turbines in the farm, or rated power of individual turbines) as the loss of kinetic energy reduces the amount of energy available for further utilisation. Figure 5 shows that in the medium and high rated energy farms most of energy generation occurs at the periphery of the farm; the turbines in the centre generate energy from already reduced water flow.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Conceptually similar effect of reduction of maximum extractable power due to the influence of turbines on the current in a channel was reported earlier (Garrett and Cummins, 2008; Bryden and Couch, 2006). The difference is however that in the open sea the effect is much stronger: whilst in a channel the maximum extractable power is reduced by a factor of 3 (Garrett and Cummins, 2008), in the open sea the decrease can be as high as 14-fold (see case “H”). The main reason is that in the open sea the currents can avoid flowing through a localised energy farm. In a channel, the slow-down of the flow in front of the turbine causes an increase in the sea level and hence partially mitigates the loss of flow. Recovery of kinetic energy due to increase in the potential energy has a much weaker effect when the size of the farm is smaller than the spread of the sea. Hence, the effect of reduction of maximum extractable power is stronger in 3-D case considered here as compared to assessments done for 1-D geometry (Carballo et al., 2009; Walkington and Burrows, 2009).

Spatial distribution of the extracted tidal power is shown in Fig. 5. In order to filter out oscillation of extracted power within a tidal cycle, the extracted power P shown in Fig. 5 is averaged over 50 h (i.e. slightly over 4 tidal cycles, there is no exact periodicity due to wind-driven and density-driven currents), corresponding to the middle of the 3rd spring tide period in Fig. 3a. In case of the low power farm “L”, the extracted power is maximum in the central part of the farm, i.e. at the location with the highest rated capacity of energy conversion per unit area. In case of the high power farm “H”, the central parts of the farm produce less energy than some of the peripheral locations. Reduction in the level of energy extraction in central parts is due to slowing down ocean currents by the process of energy extraction at the periphery of the farm.

The negative feedback of the tidal energy farm on the strength of the currents within and around the farm is seen from the charts of depth-integrated kinetic energy shown in Fig. 6. Low values of depth-integrated kinetic energy in the coastal regions are mainly due to the shallow water depth and hence smaller volumes of water involved in the movement.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The presence of the low energy farm “L” (Fig. 6b) decreases the highest levels of the kinetic energy of the currents in the area but does not change the spatial pattern, so that the location of the farm is not evident from the chart of ocean energy. A 10-fold increase in the rated power (case “M”) results in a more localised loss of kinetic energy within and in close vicinity of the farm. The low levels of kinetic energy in the coastal areas remain practically unchanged. The high energy farm “H” significantly influences the levels of kinetic energy not only within the farm but also a few tens of kilometres away. In areas neighbouring the farm from North–east and South-west the levels of KE are much lower than in the baseline case. By contrast, the energy levels to the North-west and South-east have increased. With such a great capacity to absorb energy of the current, farm “H” acts as an obstacle, nearly as an island, and deflects the currents so that they become stronger in narrow areas around the energy absorbing “island”.

The effect of the farm on the residual (tidally averaged) currents is seen from the trajectories of Lagrangean floats deployed in a model at various locations and drogued at 22.5 m depth, see Fig. 7. This figure shows trajectories of the drifters for the period 1 June to 8 July. Drifter #1 is deployed in the coastal waters SW of the farm and travels first to the NE and then heads for the Severn estuary. It does not change its trajectory even in the presence of the high power farm. Drifter #7 is deployed in the centre of the farm. In the baseline case it slowly moves to the south. In the presence of the farm “L” it circulates around the farm. In the presence of more powerful farms “M” and “H”, this drifter is trapped within the farm; this effect is particularly prominent in case of high energy farm: the trajectory is so compact that it is hidden behind the label “7” in Fig. 7d. Drifter #8 is deployed in between drifters #1 and #7. The presence of low power farm “L” causes its trajectory to be confined by the area around the farm. The impact of the medium power farm “M” causes its advection towards NE, whilst in the presence of the high power farm “H”, this drifter accelerates and follows drifter #1 on its way to the Severn estuary. Other drifters modify their trajectories in a variety of ways as shown in Fig. 7.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Changes in the travelling distance, i.e. the distance between the start and the end points for 7 out of 8 modelled drifters are shown in the table for the period of 1 month from 1 to 30 June. Drifter #6 leaves the model domain very early in all model runs and is not shown in the table.

The most significant changes in travel distance are seen for the drifters released either inside the farm (#7) or relatively close to the farm (#8; deployed 24 km from the centre). Movements of the drifter #8 are influenced by the local intensification of currents next to the farm due to effect of current “avoiding” to flow through the farm.

Combined analysis of changes in the horizontal distribution of kinetic energy and Lagrangean drifters shows that in addition to a local effect (within the area of the farm) there is a regional impact, in particular on residual currents. This impact is similar to the effect of wave energy extraction on the wave heights, which was shown to be felt as far as 30 km from the wave energy “farm” (Millar et al., 2006). Neill et al. (2009) used a 1-D sectionally-averaged model to show that energy extraction at discrete locations can alter sediment transport in the Bristol Channel well away from the turbine, about 120 km. It is likely that collective action of the turbines on the open shelf could also alter sediment transport well outside the farm, however this subject needs further investigation using a 3-D approach. In contrast to common opinion that “... because the tidal flow continues unchecked, these technologies (i.e. submerged turbines) have a minimal environmental impact” (The renewable energy centre, 2010), our results show that there is a region-wide effect on residual currents in the shelf sea, and a careful scientific analysis should be done to assess whether this effect could be harmful.

5 Conclusions

Numerical simulation of the impact of a hypothetical tidal stream energy farm on the currents in a shelf sea has shown that at relatively high levels of rated power generation capacity the farm can introduce noticeable changes to the speeds and the circulation patterns as far as a hundred kilometres away from the farm. Due to extraction energy

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



from the ocean currents, the currents themselves slow down. This effect causes the maximum extractable power to be significantly less than the estimates of the resource calculated using undisturbed, naturally flowing currents. In the case study presented here, the maximum extractable energy is at least 14 times lower than if the currents had not been disturbed by the farm. Effect of reduction of extractable power in the open shelf sea is much stronger than in a channel.

The impact on the instantaneous current speed and the kinetic energy contained in the movement of water by a circular farm of 12 km in diameter is felt mostly within the farm and in a close range of about 10–20 km. However residual, tidally averaged currents are modified as far as a hundred kilometres, and the pathways of passive tracers, which are modelled with Lagrangean floats and mimic dispersion of pollution, are disturbed.

It should be noted that the purpose of this study was to give only the first estimates of the reduction in resource and the region-wide impacts of the energy farm located in the open shelf sea. As such the numerical values given in this paper should be considered purely as examples. Both effects: reduction of extractable energy and environmental impact – could be lower or larger depending on the shape, size and location of the farm. Change in residual currents could also be different at different seasons and in different years as these currents incorporate weather-dependent wind-driven and seasonal density-driven components in addition to the rectified tidal flow.

Acknowledgements. The author is grateful to D. Aleynik for his help in setting up the POLCOMS model for the baseline study, to S. Wakelin for providing tidal boundary conditions and to the PRIMaRE colleagues for encouraging discussions. The post-processing methodology used in this paper was developed with support from EU FP6 SESAME and EU FP7 MyOcean projects.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



References

- Bjorn, S., Duan, J., McWilliams, J. C., Münnich, M., and Neelin, J. D.: Entrainment, Rayleigh Friction, and Boundary Layer Winds over the Tropical Pacific. *J. Climate*, 15, 30–44, 2002.
- Black and Veatch Consulting Ltd.: Phase I UK tidal stream energy resource assessment. Technical report 107799/D/2200/03, Carbon Trust, London, July 2005.
- Boyer, T. P., Levitus, S., Garcia, H., Locarnini, R. A., Stephens, C., and Antonov, J.: Objective analyses of annual, seasonal, and monthly temperature and salinity for the world ocean on a 0.25° grid, *Int. J. Climatol.*, 25, 931–945, doi:10.1002/JOC.1173, 2005.
- Bryden, I. G. and Couch, S. J.: Marine energy extraction: tidal resource analysis, *J. Renew. Energy*, 2006, 31(2), 133–139, 2006.
- Carballo, R., Iglesias, G., and Castro, A.: Numerical model evaluation of tidal stream energy resources in the Ria de Muros (NW Spain), *Renewable Energy* 34, 1517–1524, 2009.
- DE: Department of Energy (DE), Central Electricity Generating Board and Severn Tidal Power Group, Severn Barrage Project: Detailed Report (EP57), HMSO, London, 99 pp, 1989.
- DTI: Our energy future -creating a low carbon economy, Department of Trade and Industry white paper, 142p., 2003.
- ETOPO2: ETOPO2v2 Global Gridded 2-minute Database, NOAA, <http://www.ngdc.noaa.gov/mgg/global/etopo2.html>, last access: 23 September 2010, 2006.
- Garrett, C. and Cummins, P.: Limits to tidal current power, *Renewable Energy* 33, 2485–2490, 2008.
- Holt, J. T., Allen, J. I., Proctor, R., and Gilbert, F.: Error quantification of a high resolution coupled hydrodynamic-ecosystem coastal-ocean model: part 1 model overview and assessment of the hydrodynamics, *J. Marine Syst.*, 57, 167–188, 2005.
- Holt, J. T. and James, I. D.: An s-coordinate density evolving model of the northwest European continental shelf Part 1 model description and density structure, *J. Geophys. Res.*, 106, 14015–14034, 2001.
- Huntley, D. A.: Tides on the North-West European Continental shelf, in: *North-west European Shelf Seas: Physical and Chemical Oceanography and Physical Resources v. 2: Sea Bed and the Sea in Motion*, edited by: Banner, F. T., (Elsevier oceanography series), 301–352, 1980.
- IEA: Key World energy statistics, International Energy Agency, http://www.iea.org/textbase/nppdf/free/2009/key_stats_2009.pdf, last access: 14 September 2010, 2009.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Lewis, K., Allen, J. I., Richardson, A. J., and Holt, J. T. : Error quantification of a high resolution coupled hydrodynamic-ecosystem coastal-ocean model: Part3, validation with Continuous Plankton Recorder data, *J. Marine Syst.*, 63, 209–224, 2006.
- Li, Y., Lence, B. J., and Calisal, S. M.: Modeling the Energy Output from an In-Stream Tidal Turbine Farm, *Journal of Computers*, 4(4), 288–294, 2009.
- List of largest power stations in the world: Wikipedia, http://en.wikipedia.org/wiki/List_of_largest_power_stations_in_the_world, last access: 14 September 2010, 2010.
- Marine Current turbines, available from: <http://www.marineturbines.com/21/>, last access: 14 September 2010, 2010.
- Millar, D. L., Smith, H. C. M., and Reeve, D. E.: Modelling Studies of the Sensitivity of the Shoreline Wave Climate to the Proposed Wave Farm Development off the North Coast of Cornwall, *Ocean Eng.*, 34(5–6), 884–901, 2006.
- Mueller, M. and Wallace, R.: Enabling science and technology for marine renewable energy, *Energ. Policy*, 36, 4376–4382, 2008.
- Neill, S. P., Litt, E. J., Couch, S. J., and Davies, A. G.: The impact of tidal stream turbines on large-scale sediment dynamics, *Renew. Energ.*, 34, 2803–2812, 2009.
- Pedlosky, J.: *Geophysical Fluid Dynamics*, Springer, 728 p., 1990.
- SDC: Sustainable Development Commission (SDC), Tidal Power in the UK: Research Report 3 – Severn Barrage Proposals, available from: <http://www.sd-commission.org.uk/publications.php?id=610>, 2007.
- Shapiro, G. I., Huntley, D. A., and Aleynik, D. L.: Circulation and sediment transport patterns in eastern Celtic Sea. 14th Biennial Challenger Conference for Marine Science, National Oceanography Centre, Southampton, 6-9 September 2010, available from: www.challenger2010.org.uk, last access: 15 September 2010, 2010.
- Siddorn, J. R., Allen, J. I., Blackford, J. C., Gilbert, F. J., Holt, J. T., Holt, M. W., Osborne, J. P., Proctor, R., and Mills, D. K.: Modelling the hydrodynamics and ecosystem of the North-West European continental shelf for operational oceanography, *J. Marine Syst.*, 65, 417–429, 2007.
- Soerensen, H. C. and Weinstein, A.: Ocean Energy: Position paper for IPCC. Key Note Paper for the IPCC Scoping Conference on Renewable Energy, Lübeck, Germany, http://www.eu-oea.com/euoea/files/ccLibraryFiles/Filename/000000000400/Ocean_Energy_IPCC_final.pdf, last access: 14 September 2010, 2008.
- Stiesdal, H., Petersen, K. O., and Thisted, J.: An adaptable 1MW wind turbine, in: *Proceed-*

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- ings of the European Wind Energy Conference, Nice, France 1-5 March 1999, edited by: Petersen, E. L., James & James Science Publishers, 741–744, 1999.
- The renewable energy centre. <http://www.therenewableenergycentre.co.uk/contactus.html>, last access: 15 September 2010, 2010.
- 5 Xia, J., Falconer, R. A., and Lin, B.: Impact of different tidal renewable energy projects on the hydrodynamic processes in the Severn Estuary, UK, *Ocean Model.*, 32, 86–104, 2010.
 - Walkington, I. and Burrows, R.: Modelling tidal stream power potential, *Appl. Ocean Res.*, 31, 239–245, 2009.
 - Williams, G. E.: Geological constraints on the Precambrian history of Earth’s rotation and the Moon’s orbit, *Rev. Geophys.*, 38(1), 37–59, doi:10.1029/1999RG900016, 2000.
 - 10 Wu, Z., Battisti, D. S., and Sarachik, E. S.: Rayleigh friction, Newtonian cooling, and the linear response to steady tropical heating, *J. Atmos. Sci.*, 57(12), 1937–1957, 2000.

Effect of tidal stream power generation

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



OSD

7, 1785–1810, 2010

Effect of tidal stream power generation

G. I. Shapiro

Table 1. Travel distance by Lagrangean floats over 30 days.

Drifter #	1	2	3	4	5	7	8
Travel distance in the baseline case, km	137	82	44	62	25	18	55
Distance travelled as percentage of the baseline case, %							
Farm “L”	95	92	102	97	123	109	54
Farm “M”	94	100	108	104	132	24	113
Farm “H”	99	97	115	74	51	13	238

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion




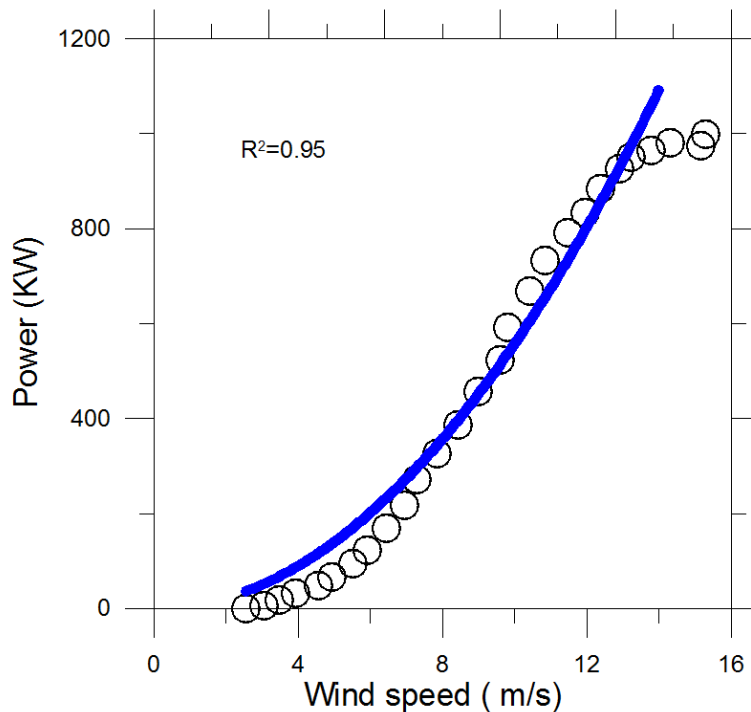


Fig. 1. Measured power curve for Bonus 1MW LM Glasfiber turbine (Stiesdal et al., 1999) and its approximation by a quadratic curve. Determination coefficient, which is a measure of agreement between data and the fitting curve is $R^2=0.95$.

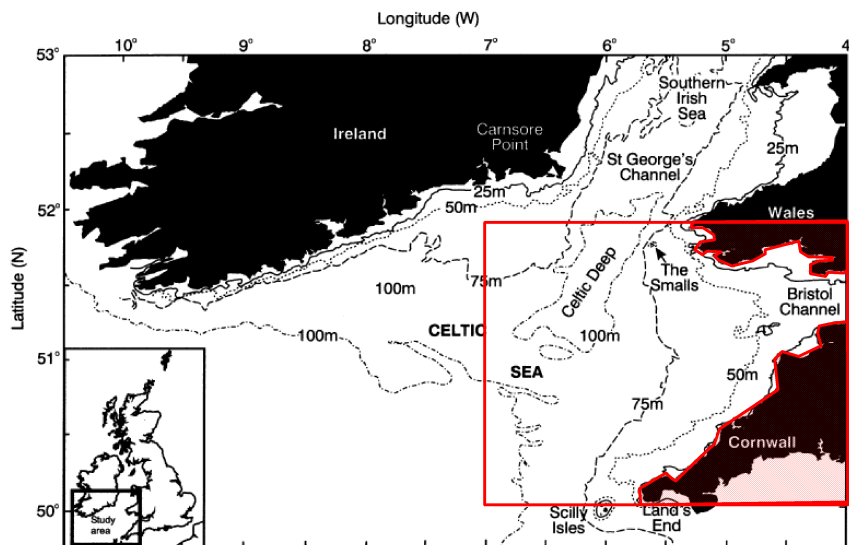

1805

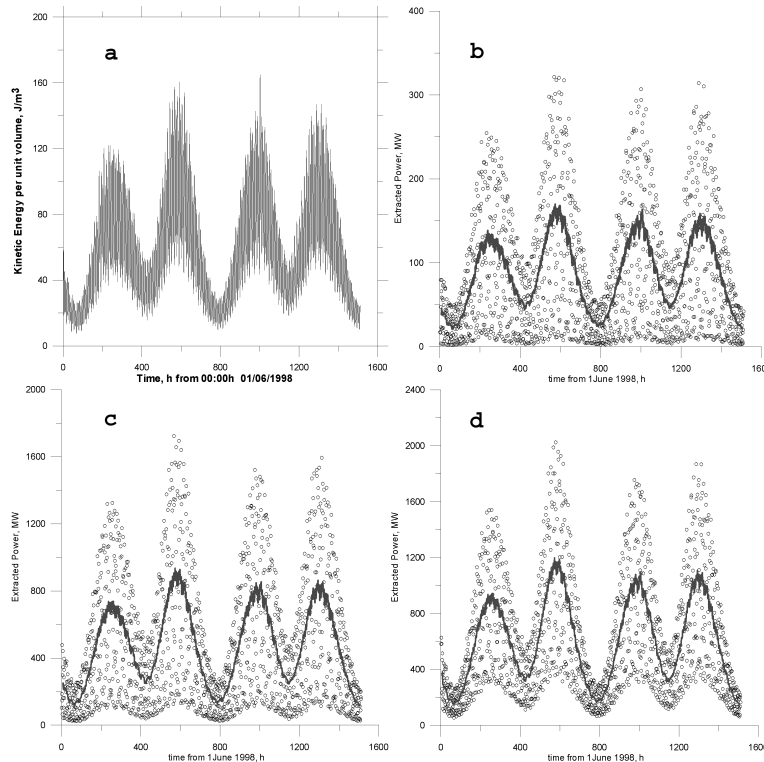


Fig. 3. Time series of kinetic energy per unit volume averaged over the study area **(a)** and power loss from ocean currents due to tidal energy farm at different rates of energy extraction: **(b)** low, **(c)** medium, and **(d)** high rated capacity farm. Open circles show values of power extraction spatially integrated over the whole model domain, solid curves show a running mean with a 12 h averaging window.

G. I. Shapiro

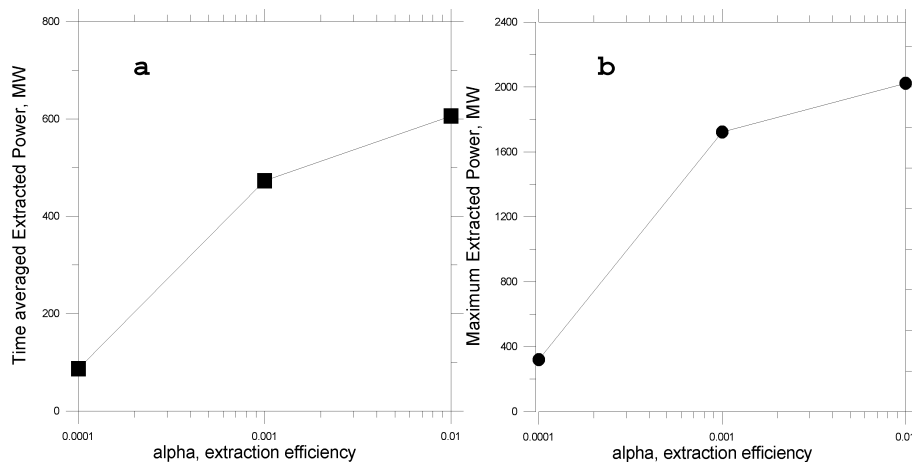


Fig. 4. Mean and maximum extracted energy by the tidal energy conversion farm as a function of the rated power capacity of the farm represented by the Rayleigh coefficient α .

**Effect of tidal stream
power generation**

G. I. Shapiro

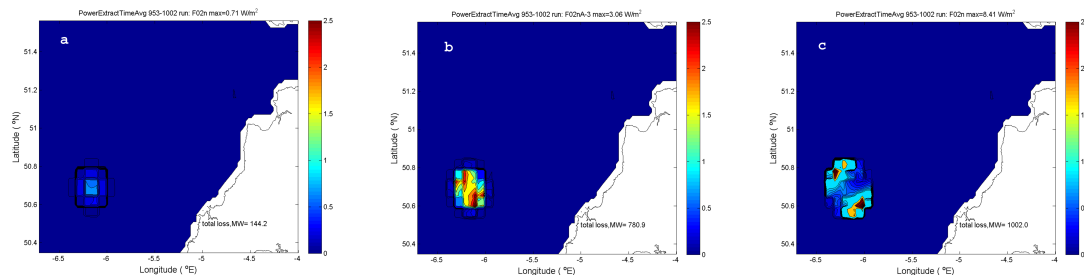


Fig. 5. Spatial distribution of the mean extracted power in W/m^2 for the 3 versions of the tidal energy farm: **(a)** – low, **(b)** – medium and **(c)** – high rated power capacity.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Effect of tidal stream power generation

G. I. Shapiro

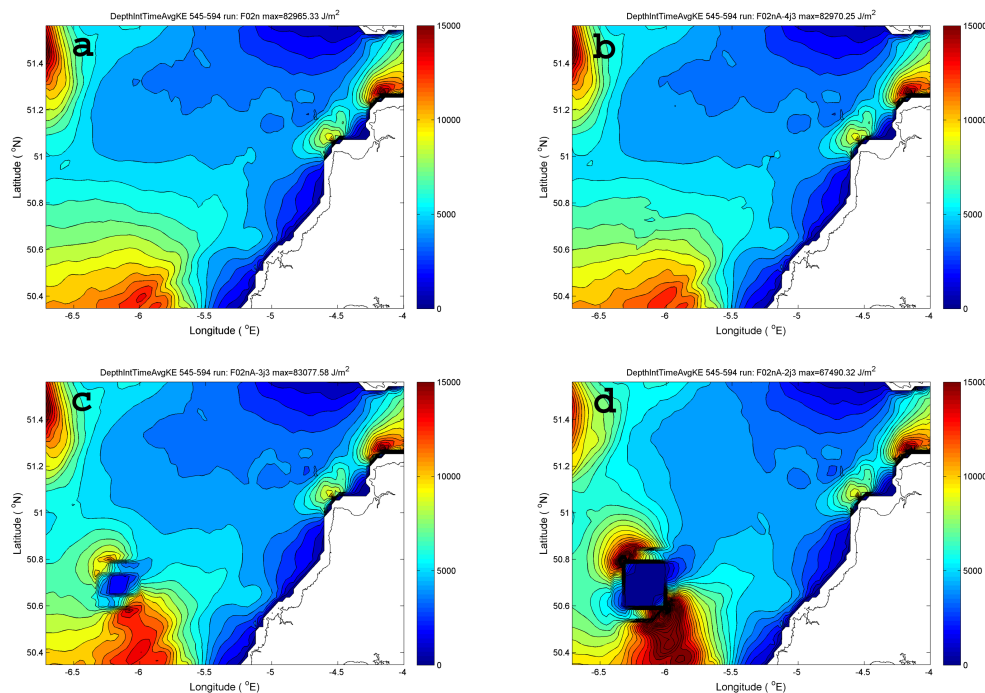


Fig. 6. Spatial distribution of kinetic energy per unit area (J/m^2) integrated over depth from bottom to the surface and averaged over 50 h. Time averaging is centred around the spring high water corresponding to the 2nd spring period in Fig. 3. The charts represent 4 cases: **(a)** – the baseline case (no energy extraction) **(b)** – low, **(c)** – medium, and **(d)** – high rated power capacity farm.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Effect of tidal stream
power generation**

G. I. Shapiro

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

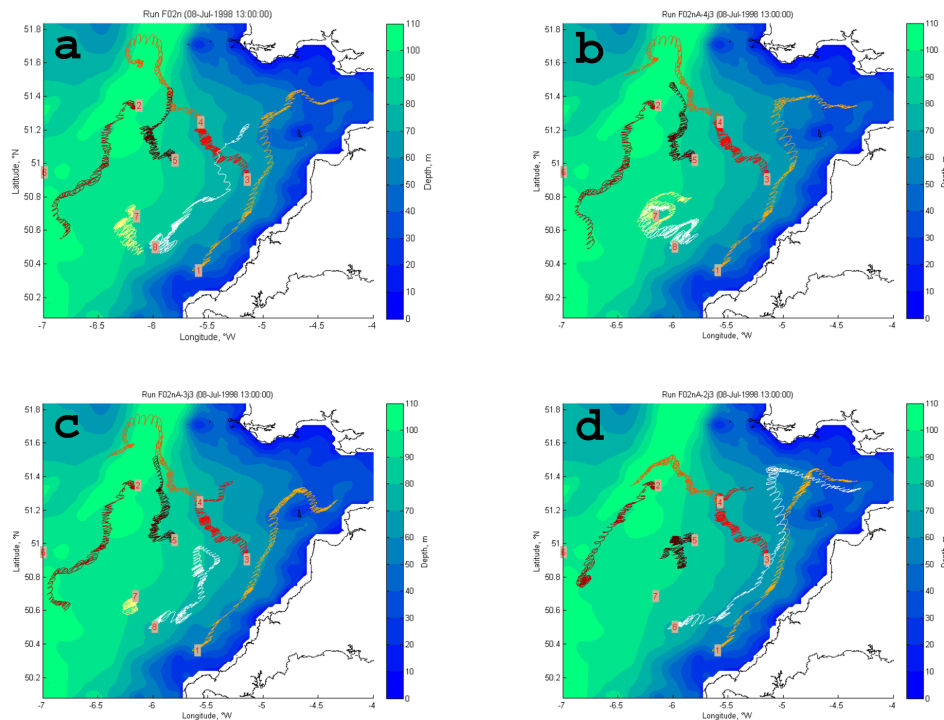


Fig. 7. Simulated trajectories of Lagrangean drifters drogued at 22.5 m depth. **(a)** – baseline case, **(b)** – low, **(c)** – medium, and **(d)** – high rated power capacity farm for the period from 00:00 UT 1 June to 13:00 UT 08 July 1998.