

Analysis of the effect of fish oil on wind waves and implications for air-water interaction studies

Alvise Benetazzo¹, Luigi Cavaleri¹, Hongyu Ma², Shumin Jiang², Filippo Bergamasco³, Wenzheng Jiang², Sheng Chen², Fangli Qiao²

¹ Istituto di Scienze Marine (ISMAR), Consiglio Nazionale delle Ricerche (CNR), Venice, Italy.

² First Institute of Oceanography (FIO), State Oceanic Administration (SOA), Qingdao, P. R. China.

³ DAIS – Università Ca' Foscari, Venice, Italy.

Correspondence to: A. Benetazzo (alvise.benetazzo@ve.ismar.cnr.it)

Abstract. Surfactant layers with viscoelastic properties floating on the water surface damp short gravity-capillary waves. Inspired by the known virtue of fish oil to still angry seas, a laboratory study has been made to analyze the wind-wave generation and the interaction between wind waves, paddle waves and airflow in a tank containing a thin fish oil film uniformly spread on the water surface. The research was aimed at verifying for the first time the effectiveness of fish oil in suppressing wind waves, and at addressing the general question on how a polar surfactant with high dilatational modulus significantly alters the surface wave field and consequently the momentum transfer across the air-water interface. In this respect, our results expand previous investigations on the same topic. With a thin layer of oil on the surface, we have found that in the wind-only condition (no paddle waves) the wave field does not grow from the rest condition. This equilibrium is altered by paddle (long) waves, the generation and evolution of short waves (in clean water and with oil) being modified by their interaction with the orbital velocity of the long waves and their effect on the airflow. Paddle waves do grow under the action of wind, how much being similar in clean and oily water conditions, a fact we ascribe to the similar distortion of the wind vertical profile in the two cases. We have also verified that the wind-supported stress on the oily water surface has been able to generate a surface current, whose magnitude turns out to be comparable to the one in clean water. We stress the benefits of experiments with surfactants to explore in detail the physics at, and the exchanges across, the wavy and no-wavy air-water interface.

Keywords: Wind-wave growth; Surfactant; Fish Oil; Marangoni forces; Paddle waves; Air-sea interaction.

1 1 Introduction

2 It is well known that the addition of an almost mono-molecular film (thickness from 10^{-9} to 10^{-8} m) of surfactant
3 (blend of *surface active agent*) to the water surface diminishes the energy of gravity-capillary waves by altering the
4 surface tension at the water-air interface (Fiscella et al., 1985). For this reason, oily surfactants were used for
5 centuries by seamen to smooth the ocean surface waves, so much that expressions as “to pour oil on troubled
6 water” have acquired a more general meaning. Crucial in this respect is the type of oil, in particular its polarity.
7 Mineral oils, often used for this purpose during the Second World War, are less effective because their molecules
8 tend to group together in a heap. On the contrary the polar molecules of fish, and partly also vegetable, oils repel
9 each other. Hence, once poured on water, they tend to distribute rapidly on the available surface reaching a quasi-
10 monomolecular layer (see e.g. Cox et al., 2017).

11 Known since ancient time, this damping effect was first studied in the 19th century by the Italian physicist
12 Carlo Marangoni (Marangoni, 1872), hence the official name of the process. In relatively recent times the first
13 report of the resonance-type Marangoni damping of wave spectra (briefly sketched in Appendix A) comes from
14 Cini et al. (1983) who had noted the effect in the polluted (although by mineral oils) water in the gulf of Genoa,
15 Italy. However, clear evidence in the open sea of high damping of surface waves in the short-gravity-wave region
16 by mono-molecular slicks was first verified by Ermakov et al. (1985, 1986) during field experiments in the Black
17 Sea.

18 The Marangoni damping can be effective for surface waves in two possible conditions. The first one is in
19 open ocean, in which an existing wind-forced wave field travels through a surfactant patch, with the consequent
20 possibility of detection (lack of return signal by damped short waves) by microwave radars (Feindt, 1985). Direct
21 in situ observations of the surfactant effects on wind waves have been however very limited because of the
22 challenges to operate in stormy conditions. According to the Marangoni mechanism, for oily surfaces the energy
23 dissipation process is quite selective in wavenumbers, but its effects are not, since it spreads (although to a lesser
24 extent) towards longer and shorter waves via nonlinear interactions and modification of the airflow profile.
25 Hühnerfuss et al. (1983) in a slick experiment carried out in the North Sea found that waves with wavelength up to
26 3 m are significantly decreased in amplitude when they travel through a 1.5-km-long monomolecular surface film
27 patch. The result is that the wave field is rapidly smoothed and progressively attenuated as it propagates within a
28 surfactant patch (Ermakov et al., 1986). The second condition, typical of laboratory experiments (e.g. Hühnerfuss

1 et al., 1981; Mitsuyasu and Honda, 1986), is where the wind blows over a water surface homogeneously covered
2 (since the rest condition) with a surfactant film. Compared with a clean water environment, since the wind onset,
3 the coupled air-water system is adjusted to a new state, characterized by a large suppression of the generation of
4 wind waves and a change of the wind stress corresponding to the reduction of form drag of the wave field.

5 The suppression of wind-generated waves due to the oil slick alters heavily the air-sea interaction process

6 (Mitsuyasu and Honda, 1986), but the full mechanism remains poorly understood (Cox et al., 2017). In this respect,
7 it is generally agreed that, in clean water, the growth of the first detectable ripples on the water surface is rather
8 well explained by the effect of air turbulence advected by the wind (Phillips, 1957). That process is quickly
9 overtaken as the waves grow by the feedback caused by the wave-induced pressure oscillations in the air, as soon
10 as the airflow vertical profile is modified by the presence of waves. Miles (1957) proposed a wave growth
11 mechanism that accounts for this change. This theory was extended and later applied by Janssen (1991) to wave
12 forecasting. Its validity is questioned for very short waves whose phase speed is as slow as the air friction velocity
13 (Miles, 1993). According to the shear-flow model by Miles, waves with phase speed c grow when the curvature in
14 the vertical wind profile, at the height (called critical height) where the wind speeds equals c , is negative. As a
15 result, the wind profile changes because of the continuous transfer of energy to the waves (Janssen, 1982). The
16 growth rate is proportional to this curvature and it has an implicit dependence on the roughness length on the wavy
17 water surface. Hence, as expected, any modification of the vertical wind shear (for instance induced by the oil film
18 effect) modifies the momentum transfer from wind to waves.

19 In this respect, in this study we verify with experiments in a wave tank that the peculiarity of fish oil is

20 indeed striking. Previous researches suggested (e.g. Alpers and Hühnerfuss, 1989) a correlation between the
21 intensity and frequency-range of the wave damping and the chemical properties (namely the dilatational modulus)
22 of the surfactant. Therefore our study explores for the first time the effect of fish oil (a polar surfactant with high
23 dilatational modulus) by laboratory experiments in which the oil effects on the wind shear stress and the wave
24 growth are assessed in different conditions for short (wind-generated) and collinear long (paddle-generated) waves
25 The latter ones introduce the problem of the interaction between long and short waves, and between long waves
26 and the wind profile.

27 In the open ocean, the influence of swell on local wind-wave generation is a known fact, albeit a firm

28 explanation of the underlying mechanism has not been reached. Hwang et al. (2011) discuss how the Tehuano-

1 wind generated waves, on the Pacific coast of Mexico, are affected by the incoming oceanic opposing swell. With
2 some similarity, the cases of following or opposing swell seem to differ somehow in their physics. The “following
3 swell” case was first studied by Mitsuyasu (1966) and later intensively by Donelan (1987) who suggested that a
4 swell (in practice paddle waves; also his experiments were done in a wind- and paddle-wave tank at the University
5 of Miami, USA) induces a detuning of the resonance conditions for non-linear interactions among wind waves.
6 Later, in the studies by Phillips and Banner (1974) and Donelan et al. (2010), the suggested explanation was the
7 enhanced wind wave breaking due to the wind and paddle waves interaction. Also, the influence of paddle waves
8 increases with their steepness. More recently, Chen and Belcher (2000) proposed the idea that the long wave exerts
9 a drag on the airflow, which reduces the turbulent stress in the airflow that is available to generate wind waves.

10 In this context, the broad objective of the present study is to address the question on how the fish oil alters

11 the generation of wind and paddle waves and consequently the momentum transfer across the air-water interface,
12 including the effective wind stress for the generation of surface currents. The study complements previous
13 laboratory investigations of Hühnerfuss et al. (1981) and Mitsuyasu and Honda (1986) and discusses how the
14 experiments with surfactants can open new perspectives in the methodology of examining the air-sea interaction
15 phenomena.

16 The paper is organized as follows. Section 2 makes a general description of the experimental set-up in the tank,
17 lists the general plan of experiments with wind and paddle waves in clean water and with oil, and describes the
18 water elevation and airflow data collected during the tests. The results of the experiments are examined in Section
19 3, where we show the response of the coupled air-water system to the presence of fish oil slick. The principal
20 results and implications for air-water interaction studies of the present investigation are discussed in Section 4.
21 Finally, the main findings of the study are summarized in Section 5. The manuscript is complemented with two
22 videos recorded during the experiments showing the effect on wind and paddle waves of the surface layer of fish
23 oil.

24

25 .


26

27

1 2 Experiment

2.1 The experimental setup

2 The experiments described in this study were performed in a large wind- and paddle-wave facility allowing the
3 generation of winds at velocities comparable with those in open sea (but no extreme conditions). The
4 measurements were carried out in the flume of the First Institute of Oceanography (FIO, Qingdao, P.R. China)
5 illustrated schematically in Figure 1. The tank dimensions are: length 32.5 m, wall-to-wall cross-section 1.0 m,
6 ceiling at 0.8 m above the mean water surface. The water depth is 1.2 m, satisfying the deep-water condition for the
7 wind-driven gravity-capillary, and practically also paddle, waves analyzed in this study. The smallest longitudinal
8 natural frequency of the tank is 0.052 Hz. Side walls are made of clear glass to enable visualization of the wave
9 field. A water pipe parallel to and below the flume allows the continuity between the two ends of the tank.

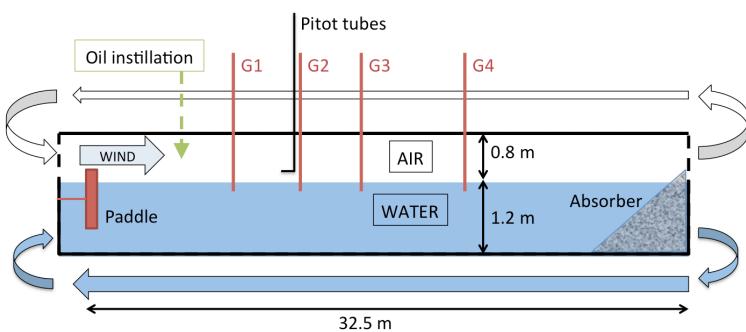

11 **Figure 1: Schematic longitudinal diagram of the wave flume arrangement at the First Institute of Oceanography flume (Qingdao,
12 P.R. China). For the sake of clarity, horizontal and vertical scales are distorted. The arrows indicate the direction of the flow.**

13 The wind tunnel is mounted atop the wave tank which is closed with side glass walls and ceiling. The
14 airflow could be driven up to reference speed of 12 m/s. Mechanically-generated (paddle) waves coexisting with
15 wind waves could be generated by a piston-type paddle in the range of periods from 0.5 s to 5.0 s (frequencies from
16 0.2 Hz to 2.0 Hz) and dissipated at the downwind end of the tank on a sloping beach of fibrous matter. Four
17 calibrated capacitance-type wave gauges collecting synchronous water surface elevation data for 300 s at 50 Hz
18 were distributed at fetch (along the tank main axis) $X = 8.0$ m (probe G1), 12.0 m (G2), 15.5 m (G3), and 20.5 m
19 (G4). The fetch $X = 0.0$ m corresponds to the inlet for wind in the water tank. For the statistically steady part of the
20 wave records the variance frequency-spectrum of water surface elevation $z(t)$ were computed by using the Welch's
21 overlapped segment averaging estimator (Welch, 1967).

1 For characterization of the vertical profile of the along-channel component of the airflow velocity, five
 2 Pitot tubes sampling at 1/7 Hz have been located at $X = 11.5$ m in the center of the cross-section and distributed at
 3 different heights h above the still water surface, respectively (from tube 1 to 5) at $h = 8.3$ cm, 18.3 cm, 28.3 cm,
 4 38.3 cm, and 48.3 cm. Estimates of the wind stress were derived fitting the Pitot tube observations with a
 5 logarithmic law function of h . For an aerodynamically rough airflow, the mean value of the along-channel
 6 component of the wind velocity \bar{U} in the outer turbulent layer at height h above the boundary is expected to follow
 7 a self-similar Karman-Prandtl logarithmic law as a function of height

$$\bar{U}(h) = \frac{u_*}{\kappa} \log\left(\frac{h}{h_0}\right) \quad (1)$$

8 where the overbar indicates the temporal averaging process, u_* is the friction velocity along the same direction as
 9 \bar{U} , $\kappa = 0.41$ is the von Kármán's constant. The non-zero parameter h_0 has the meaning of the roughness height
 10 where \bar{U} appears to go to zero (namely h_0 is the virtual origin of the mean velocity profile). In presence of waves,
 11 the shape of the wind velocity profile $\bar{U}(h)$ is governed by both turbulent and wave-induced momentum flux, the
 12 latter being function of the wind input source term in Eq. (11). The transport of horizontal momentum due to
 13 molecular viscosity is considered negligible, except very near the surface where the vertical motion is suppressed.
 14 The total air-side shear stress τ_a at the boundary of the flow is then approximated as

$$\tau_a = \rho_a u_*^2 \quad (2)$$

15 with ρ_a the air density.

16 To account in Eq. (1) for the non-slip condition, the measured airflow velocity $U_a(h)$ has to be taken
 17 relative to along-wind components of the water surface velocity u_{w0} at $h = 0$, i.e. $U(h) = U_a(h) - u_{w0}$. It is thus
 18 assumed that the mean water surface drift velocity u_{w0} constitutes the boundary condition at $h = 0$ for the vertical
 19 profile of the airflow velocity. Wu (1975) found that at the air-water interface, the wind-induced current is
 20 proportional to the friction velocity of the wind, and it is associated to the wind shear, Stokes drift, and momentum
 21 injection during wave breaking events. For non-breaking wavy surfaces, the wind-induced surface current was
 22 determined to be around 50% of the airflow friction velocity (Phillips and Banner, 1974 and Wu, 1975). In a (clean
 23 water) wind-wave tank and at steady conditions, the value of u_{w0} can be related to the maximum value of $U_a(h)$.
 24 This is not achieved at the largest distances from the water due to the presence of the tank roof. A value u_{w0} around
 25 3.3% of the free-stream maximum wind velocity seems to be a reasonable approximation (Liberzon and Shemer,
 26 2011; Peirson, 1997; Wu, 1975) and was used in this study. The accuracy of the wind stress obtained from the

1 profiles measured by Pitot tubes in a wave tank was examined by Liberzon and Shemer (2011) who found that the
 2 values of the wind stress obtained from the measurements by the Pitot tube and those calculated from the Reynolds
 3 stresses (using a X-hot-film thermo-anemometer) agree within about 10 % mean difference.

4 Videos showing the water surface conditions in clean water and in water with oil complement the available
 5 data providing a plain perception of the fish oil effect on the surface waves.

2.2 The experiments

6 Our experiments aimed at analyzing the different results, using the different combinations of reference wind speed
 7 U_r , paddle waves (changing the peak wave period T_p , and significant wave height H_s) and oily surface. The data of
 8 each experiment were later screened for correct data availability and consistency among the different instruments.
 9 This led to exclude several records considered not suitable (independently of the physical results) for the final
 10 analysis. This was based on the six experiments listed in Table 1. Two different blower reference speeds were
 11 analyzed, namely $U_r = 6$ m/s and 8 m/s, and one set of irregular paddle waves (JONSWAP spectrum with $T_p = 1.0$ s
 12 and $H_s = 6.2$ cm; steepness $H_s / L_p = 0.04$, with L_p the peak wavelength). Note that many of these experiments have
 13 been repeated up to four times. All experiments were initiated with no wind and undisturbed water surface.

Exp.	W06	W06-O	W06-O-NI	W08	W08-P	W08-P-O
Wind	6 m/s	6 m/s	6 m/s	8 m/s	8 m/s	8 m/s
Paddle	-	-	-	-	JONSWAP Spectrum ($T_p = 1.0$ s, $H_s = 6.2$ cm)	JONSWAP Spectrum ($T_p = 1.0$ s, $H_s = 6.2$ cm)
Oil	-	Instillation	No instillation	-	-	Instillation

14 **Table 1: List of experiments performed in the wind- and paddle-wave tank, using clean water (ordinary tap water) and after
 15 instilling fish oil. The wind speed is the reference value U_r imposed at the blower. For paddle waves, T_p is the peak period and H_s the
 16 significant wave height. Blanks denote not applicable cases.**

17 Three experiments (two with wind waves and one with wind and paddle waves) were made with the fish
 18 oil-covered water surface. The dilational modulus ε of this type of oil is roughly 0.03 N/m (Foda and Cox, 1980),
 19 hence its resonance frequency given in Eq. (10) is estimated to be $\omega_{\text{res}} = 23.7$ rad/s (i.e. linear frequency of 3.77
 20 Hz and wavelength of about 11 cm). Moreover, the radial spreading speed of fish oil is around 0.14 m/s,
 21 sufficiently large to keep uniform the oil film that might be broken by the wave action (Cox et al., 2017). Before
 22 performing the experiments with the slick-covered surface, the oil was instilled from the ceiling at fetch $X = 4$ m,
 23 releasing 26 drops with the blower at rest. Estimating each drop of volume about 50×10^{-9} m³, the average oil

1 thickness on the water surface was 4×10^{-8} m, namely a few molecular layers. During the experiments W06-O and
2 W08-P-O (see Table 1) the oil film was preserved by continuously instilling onto the water surface oil drops, while
3 the dropping was interrupted (no instillation) at the onset of the wind start in the experiment W06-O-NI.

4 A crucial point in wind wave tank measurements concerns the correct reference system for waves generated by
5 wind. The wave data acquired by the probes in the tank are represented in a fixed (absolute) reference system,
6 while the response of the wave field to the oil film is intrinsic in the wave dynamics. Therefore the sea surface
7 elevation energy spectrum E must be mapped in a reference system moving with the wind-generated near-surface
8 water current. To this end, the wave spectrum must therefore be transformed from absolute f_a to intrinsic
9 frequencies f_i , i.e. those that would have been recorded by a probe moving with the current. Indeed, for waves
10 propagating over a moving medium, the Doppler effect modifies the observed frequency of each elementary
11 periodic wave that makes up the random wind field (Lindgren et al., 1999). This effect can be particularly large for
12 short waves at sea (hence modifying the slope of the high-frequency spectrum tail; Benetazzo et al., 2018), and so
13 in a wave tank where waves are generally short whilst the current speed can be a non-negligible fraction of the
14 wave phase speed.

15 For harmonic waves in the limit of small wave steepness and neglecting the modulation of short waves by long
16 waves (Longuet-Higgins and Stewart, 1960), the relation between f_a and f_i is given by (Stewart and Joy, 1974):

$$f_a - f_i - [ku_w \cos(\theta - \theta_U)]/(2\pi) = 0 \quad (3)$$

17 where u_w is an appropriate (Kirby and Chen, 1989; Stewart and Joy, 1974) water velocity vector (of direction θ_U),
18 and θ the wave direction. At the leading order, it is assumed that the dispersion relationship of the gravity-capillary
19 wave theory provides a unique relationship between the frequency f_i and the wavenumber k as follows:

$$2\pi f_i = \sqrt{gk + \frac{T}{\rho} k^3} \quad (4)$$

20 with T the water surface tension, ρ the water density, and g is the gravity acceleration. In accordance to Eq. (3),
21 the spectral representation in absolute frequencies experiences a shifting of the energy distribution (see Figure 5
22 below). In our case, we consider that short waves in the tank mostly feel the surface current drift but we neglect the
23 Doppler shift associated with the orbital motion of long waves. That drift can be estimated by the wind speed, and
24 in the tank assumed aligned with the waves (namely, $\theta = \theta_U$). Hence, the frequency spectrum in intrinsic
25 coordinates can be derived as

$$E(f_i) = E(f_a)J_{ai} \quad (5)$$


1 where $J_{ai} = |df_a / df_i|$ is the Jacobian of the transformation, which in the limit of deep water can be written explicitly
 2 as

$$J_{ai} = \left| 1 + 2u_w \sqrt{gk + \frac{T}{\rho}k^3} \right| / \left(g + 3\frac{T}{\rho}k^2 \right) \quad (6)$$

3 3 Results

3.1 Wind waves without and with oil

4 We begin the examination of the change of gravity-capillary wave properties caused by the fish oil film by
 5 analyzing the effects on the water elevation z and wind speed profile $U_a(h)$ during the experiments W06 ($U_r = 6$ m/s
 6 and clean water) and W06-O (the same as W06, but with oil slick). For the latter, the wind wave field attenuation
 7 due to the Marangoni forces is readily visible in Figure 2 that shows two pictures of the water surface (taken nearby
 8 the 20-m fetch) without (left panel) and with (right panel) oil instillation. For the latter, the wind wave field attenuation
 9 due to the Marangoni forces is readily visible in Figure 2 that shows two pictures of the water surface (taken nearby
 10 the 20-m fetch) without (left panel) and with (right panel) oil instillation. After the oil film is spread on the water,
 11 the surface is largely smooth, with only tiny elevation oscillations (1 mm at most; see Figure 4) and there appears
 12 to be no organized wave motion (see also the video available as supplementary material SM1:
 13 <https://doi.org/10.5281/zenodo.1434262>). It is obvious that the presence of an extremely thin (practically mono-
 14 molecular) layer of oil on the surface alters heavily the air-sea interface properties. We analyze the situation first
 15 from the air, then from the water, point of view.

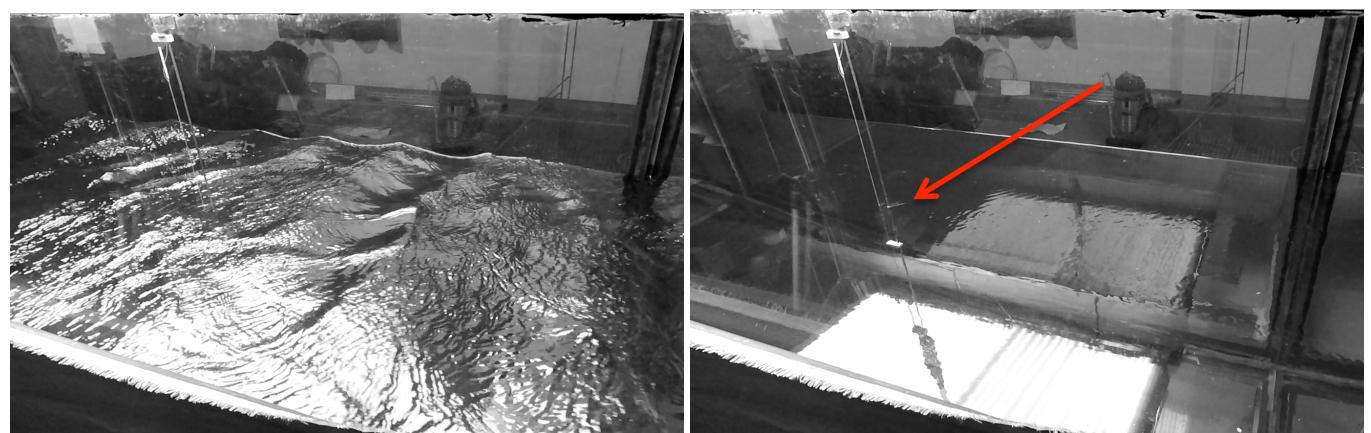

15 **Figure 2: Two photographs showing the water surface condition at fetch of about 20 m taken without (left panel) and with oil**
 16 **instillation (right panel). On both cases the water surface was forced with a reference wind speed $U_r = 6$ m/s (blowing from left to**
 17 **right on the pictures). The wave probe G4 is visible on the left-hand side of both pictures. The red arrow in the right panel points to**
 18 **the oscillating flow (vortex shedding) past the probe. See also the video available as supplementary material SM1.**


1 **3.1.1 Airflow characterization**

2 We begin evaluating the air-side stress due to the wind drag on the water surface. In the experiment W06 the
3 maximum value of $\bar{U}_a(h)$ of 6.06 m/s was found, attained at the third Pitot tube, namely at $h = 28.3$ cm from the
4 still water surface. Hence, accounting for a surface water speed $u_{w0} = 6.06 \times 0.033 \approx 0.2$ m/s, a logarithmic curve
5 was fitted (the mean absolute error of the fitting is 0.01 m/s) to the average profile $\bar{U}(h) = \bar{U}_a(h) - u_{w0}$ and the two
6 parameters $u_* = 0.29$ m/s and $h_0 = 0.1$ mm were estimated accordingly. For the lowest Pitot tube ($h = 8.3$ cm), the
7 dimensionless height $h_* = gh/u_*^2$ is 9.7, implying that from there upward wind data were collected in a region
8 where turbulent stresses are expected to dominate over wave-induced stresses (Janssen and Bidlot, 2018). The
9 typical viscous sublayer thickness approximated as $11.6\nu/u_*$ measured 0.04 mm, such that the atmospheric
10 boundary layer appeared to be aerodynamically rough. The wind shear stress τ_a based on the measurement in this
11 layer equals 0.10 N/m². The equivalent wind speed at height $h = 10$ m, extrapolated from Eq. (1), is $\bar{U}_{10} = 8.6$
12 m/s, which is in satisfactory agreement with the typical relation between u_* and \bar{U}_{10} found in a wind-wave tank
13 filled with clean water (Liberzon and Shemer, 2011; Mitsuyasu and Honda, 1986). The neutral drag coefficient
14 measured at 10-m height and defined as $C_D = (u_*/\bar{U}_{10})^2$ is 1.1×10^{-3} . The values of u_* and h_0 are in agreement
15 with those obtained in the experimental results of Liberzon and Shemer (2011), and those estimated by the bulk
16 parameterization of air-sea turbulent fluxes provided by the Coupled Ocean-Atmosphere Response Experiment
17 (COARE) algorithm (Fairall et al., 2003) that gives $\tau_a = 0.11$ N/m², using as input the profile $\bar{U}(h)$ determined in
18 our experiments.

19

20

21

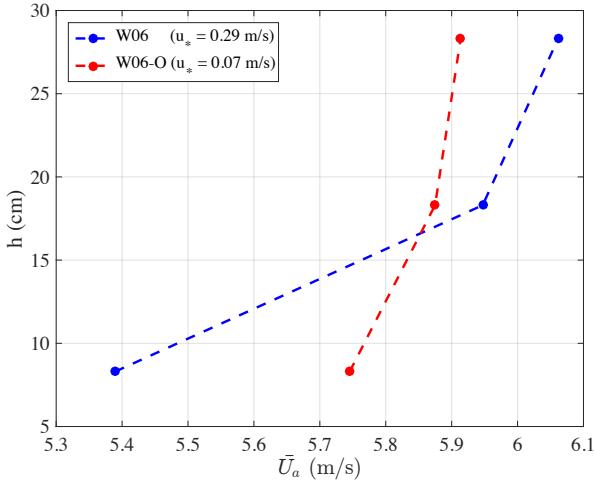

1 **Figure 3: Vertical profile of the wind velocity component \bar{U}_a measured over the water surface at fetch $X = 11.5$ m. Reference wind**
2 **speed $U_r = 6$ m/s. Clean water conditions (blue) and oil-covered surface (red). In the legend, the value of the airflow friction velocity**
3 **u_* is shown within brackets. Only the value recorded at the three lowest Pitot tubes are shown.**

5 The smoothing of the water surface in presence of oil reflects on the airflow, which differs from that over
6 clean water and has a smaller vertical gradient $d\bar{U}_a/dh$ of the wind speed (Figure 3). Because of the reduction of
7 the resistance on the water surface, the wind speed strengthens over the film-covered surface, but the effect is
8 limited to the lowest part of the turbulent airflow. Similar behavior was observed in the wind-wave tank
9 experiments by Mitsuyasu and Honda (1986). For continuity reasons, i.e. for the (practically) constant airflow
10 discharge in the tank (the difference of the discharges measured by the Pitot tubes is smaller than 1%), a less steep
11 wind profile implies a lower velocity (with respect to the clean water case) in the central line of the flow (with oil
12 the maximum value of $\bar{U}_a(h)$ was 5.91 m/s).

13 In the case of the oil film-covered surface, a problem arises, i.e. if the 3.3%-rule still holds to determine the
14 surface current drift from the wind speed. The problem stems from the fact that for clean surfaces the momentum
15 flux to the water column (i.e. for the generation of current) is the sum of the flux transferred across the air-sea
16 interface not used to generate waves and the momentum flux transferred by wave breaking. In terms of spectral
17 quantities the stress to the water column τ_w can be computed as

$$\tau_w = \tau_a - \rho_w g \int_0^{2\pi} \int_0^{k_{\max}} \frac{k}{\omega} (S_{in} + S_{nl} + S_{di}) dk d\theta \quad (7)$$

18 where we have omitted the direction of the flux that we assume aligned with the flume main axis. On the right side
19 of Eq. (7), the S terms represent the net effect of sources and sinks for the wave energy spectrum (see Appendix

1 A). In the high-frequency equilibrium range, the momentum coming from the wind and nonlinear interactions is
2 dissipated, and is therefore directly transferred to the water column.

3 The balance in Eq. (7) is plainly altered for an oil-covered surface, as it is visible in the right panel of
4 Figure 2, for which we assume $S_{\text{in}}+S_{\text{nl}}+S_{\text{di}} = 0$. In this case, the wave-induced transport is practically null, and
5 the total current drift is supported only by the stress τ_a exerted by wind at the air-sea interface. In this respect, from
6 visual inspection of the supporting movies acquired during the experiments (see the video available as
7 supplementary material SM1), we did observe the presence of a water surface drift and a high-frequency oscillating
8 flow (vortex shedding) downstream from the probes' beams (the shedding at G4 is pointed by the red arrow in the
9 right panel of Figure 2). The latter implies the presence of a near-surface drift impacting the probes. No adequate
10 instrumentation (e.g. Particle Image Velocimetry; see e.g. Adrian, 1991) had been designed in advance to obtain a
11 representation of the fluid flow close to the wavy air-water interface.

12 However, the availability of video-camera images allowed two independent estimates of near-surface water
13 drift. The first one was possible tracking the motion of tiny bubbles moving on the water surface along the tank and
14 clearly visible in the 1920x1080 pixel images captured at 60 Hz by a video-camera placed outside the tank, close to
15 the probe G4. A detailed description of the procedure is given in Appendix B. The distribution of the so-defined
16 surface speed has a mean value of 26 cm/s and standard deviation of 11 cm/s. Albeit the relatively large variability,
17 such observations clearly show that, even if the stress on the water surface is largely reduced by the oil film, a
18 surface current is still present whose order of magnitude is comparable with what one expects in clean water. A
19 possible objection to this approach is that the bubble motion could be due, partly at least, to the wind drag.
20 However, this estimate, albeit with some approximation, is supported by the second indirect estimate. On the right
21 panel of Figure 2 the wave probe across the surface is clearly visible, and there is a “wake” behind it. Indeed, as we
22 will soon discuss, the wave spectra show an isolated peak around 10 Hz that we interpret as due to the vortex
23 shedding caused by the surface current flowing around the probe support (diameter $d = 4$ mm). Use of the related
24 vortex shedding frequency $f \approx 0.21u_{w0,\text{oil}} / d$ (see later in subsection 3.1.2) suggests $u_{w0,\text{oil}} = 20$ cm/s that is close
25 (actually less than) the estimate using bubbles (which probably were partially also drifted by wind).

26 With this information, we have found that the wind stress for oil-covered smooth surface is $\tau_{a,\text{oil}} = 0.005$
27 N/m^2 , approximately 5% of τ_a , and the drag coefficient undergoes a decrease of one order of magnitude. The
28 extrapolated 10-m height wind speed $\bar{U}_{10,\text{oil}}$ is 6.3 m/s, smaller than \bar{U}_{10} , in contrast to the field observations of


1 Ermakov et al. (1986), most likely because our observations were collected in a tank with an upper roof. The
2 roughness height was determined to be very close to zero, implying that the air boundary layer for the oil-covered
3 water shows properties of a hydrodynamically smooth flow. This conclusion supports the idea presented in
4 Mitsuyasu and Honda (1986) and discussed by Mitsuyasu (2015), who showed also that for low wind speeds (few
5 meters per second) the water surface properties are similar in clean water and in water with oil.

6 **3.1.2 Wave field characterization**

7 In presence of the viscoelastic oily film, the gravity-capillary wave damping is quantified by analyzing the time
8 records $z(t)$ of the sea surface elevation field at different fetches. In this respect, Figure 4 (left panel) gives a clear
9 idea of the Marangoni damping effect, which can be quantified by noting that the standard deviation σ of $z(t)$
10 shrinks by one order of magnitude. However, the process does not involve only a decrease of the vertical
11 oscillations, as it is the whole spatio-temporal distribution of the surface elevations that is abruptly changed (right
12 panel of Figure 4). Indeed, whereas in clean water, in active wave generation, the histogram of z (high-pass filtered
13 above 1 Hz; see discussion below) has a positive skewness coefficient (as it is expected for wind-waves; see
14 Longuet-Higgins, 1963), in presence of oil the empirical histogram is quasi-symmetric around the mean (the
15 skewness coefficient is -0.03, very close to zero). This implies that for slick-covered surfaces the generation and
16 evolution of gravity-capillary waves are governed by different balance and process, which are dominated by the
17 reduced wind input and the Marangoni energy sink, which lead to a quasi-Gaussian surface elevation field at all
18 scales.

19


20

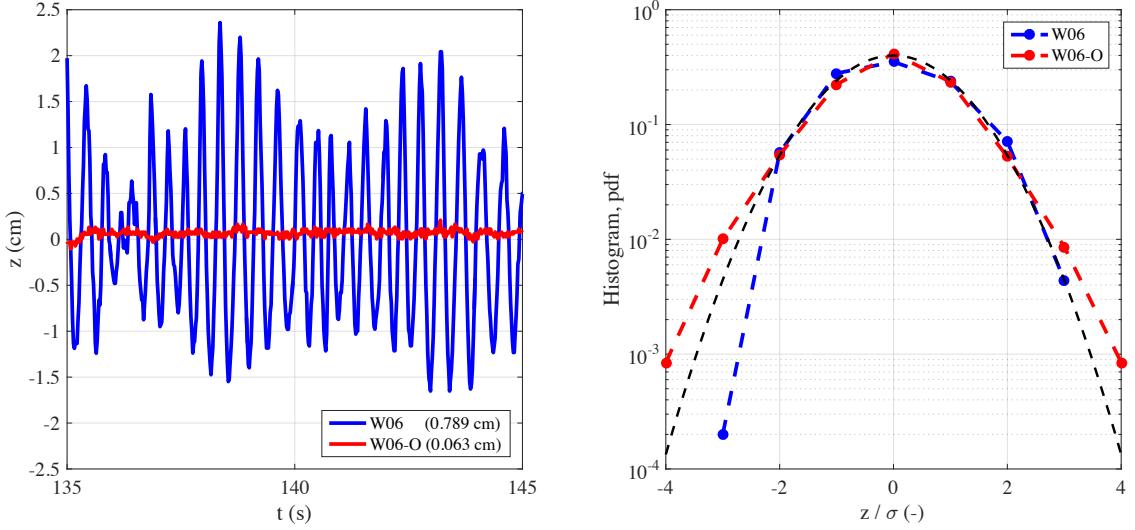

1

2 **Figure 4: Sea surface elevation for clean (blue) and slick-covered (red) surface. (left) Excerpt of the single-point record $z(t)$ at $X =$
3 20.5 m (probe G4) for the two conditions with clean water (experiment W06) and after the oil instillation (W06-O). In the legend, the
4 value of the standard deviation σ of $z(t)$ is shown within brackets. (right) Histogram of the normalized elevations, high-pass filtered
5 above 1 Hz. The black dashed line shows the Gaussian probability density function (pdf).**

6 The most general and quantified view of the effect of oil is provided by the energy spectra $E(f_a)$ and $E(f_i)$
7 (respectively absolute and intrinsic frequency) of water elevations. These are shown in Figure 5, for experiments
8 W06 (left panel) and W06-O (right panel). For a more direct comparison the G4 oil spectrum is reproduced in the
9 no-oil diagram (dashed blue line). The spectrum $E(f_i)$ was computed using the Jacobian transformation described in
10 section 2 and assuming all wavenumbers as shifted by the same current equal to that on the surface, namely $u_{w0} =$
11 0.2 m/s. Note in the “intrinsic” spectrum the expected shift towards lower frequencies, more evident in the right
12 side of the spectrum where higher frequencies move with a lower speed with respect to the current. As physically
13 sound, from now on all our considerations will deal with the intrinsic-frequency quantities. Starting with clean
14 water conditions (left panels), the variation of the wave spectra with fetch is characterized by the expected
15 downshift and overshoot of the peak of the spectrum. The total wave energy increases with fetch: the significant
16 wave height H_s grows from 1.21 cm at the shortest fetch ($X = 8$ m) to 3.16 cm at $X = 20.5$ m. It is remarkable that
17 for the slick-covered surface, there is no evidence of wave growth with fetch (right panels).

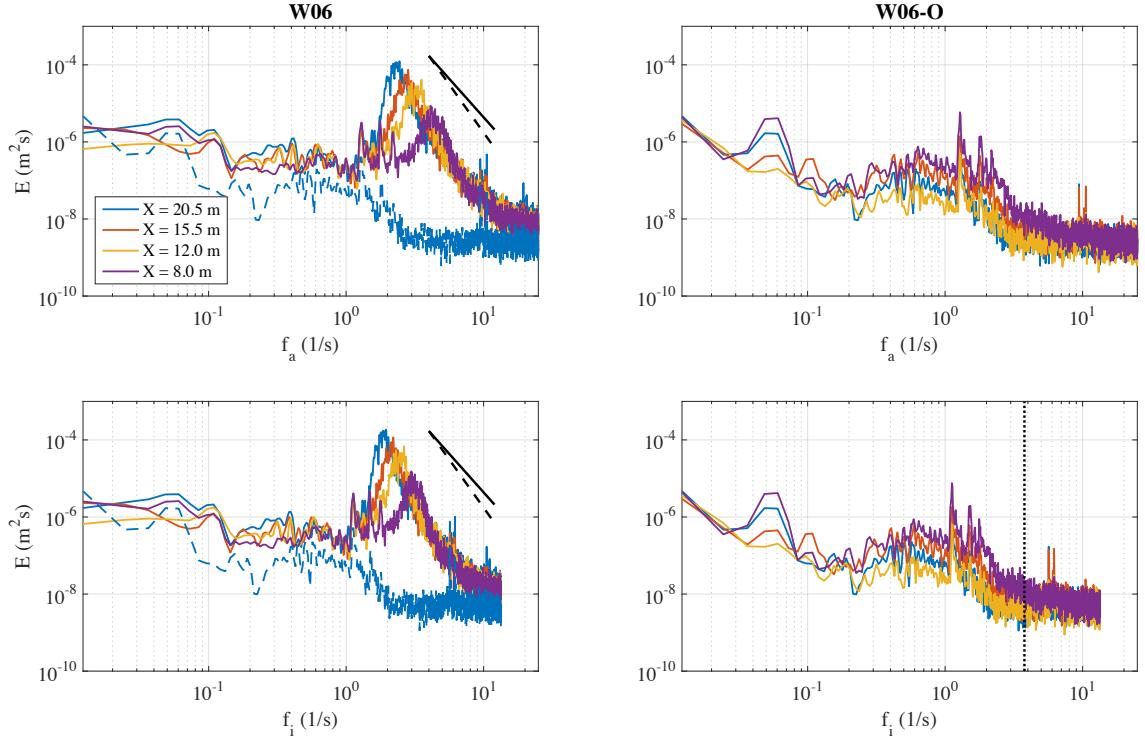


1

2 **Figure 5:** Wave energy spectra $E(f_a)$ and $E(f_i)$ of the water surface elevation $z(t)$ at different fetches. Reference wind speed $U_r = 6$ m/s.
3 (left) Clean water experiment W06. (right) Water with oil experiment W06-O (the spectrum at the fetch $X = 20.5$ m is replicated with
4 a dashed blue line on the left panels). The solid and dashed black lines are the reference spectral shape proportional to f^{-4} and f^{-5} ,
5 respectively. The vertical gray dotted line on the bottom-right panel shows the fish oil resonance frequency $f_{res} = \omega_{res}/(2\pi) = 3.77$ Hz.

6 Focusing for the time being on the comparison among the oil and no-oil cases, the differences are obviously
7 macroscopic, but it is worthwhile to analyse them for different frequency ranges. For low frequencies, say below 1
8 Hz, there is clearly some energy also in the oily spectra. Note the peaks (around 0.05 Hz) at the G1 and G4 spectra,
9 reduced at G2 and G3. Remembering (see Section 2) the longitudinal natural frequency of the tank, we interpret
10 these as “seiches” of the wave tank, obviously more visible the further the gauges are from the center of the tank. In
11 the clean water case more distributed oscillations exist, that we associate to a more active action of a possibly
12 irregular wind flow. The most interesting range is of course between 1 Hz and 4 Hz (close to the fish oil resonance
13 frequency). Here the effect of oil is macroscopic, with oil-case energy several orders of magnitude smaller than
14 without oil. Finally, still for the oil spectra, no wave signal is visible above 3-4 Hz where we expect the maximum
15 damping of surface waves due to the oily surfactants (Alpers and Hühnerfuss, 1989).

16 A more direct comparison between the W06 and W06-O spectra is obtained showing in Figure 6 for each
17 frequency the ratio of the respective spectral energies. If we represent the frequency/fetch-dependent damping
18 coefficient as the ratio $D(f_i, X) = E_o / E_c$ between the variance density spectrum of the water surface elevation with

1 oil slick (E_o) and in clean water (E_c), we then find D values as small as 10^{-4} at the longer fetches. Of course the
 2 maximum differences are at the peak frequency of the no-oil spectra, the respective frequency and ratio decreasing
 3 with fetch while the no-oil energy increases.

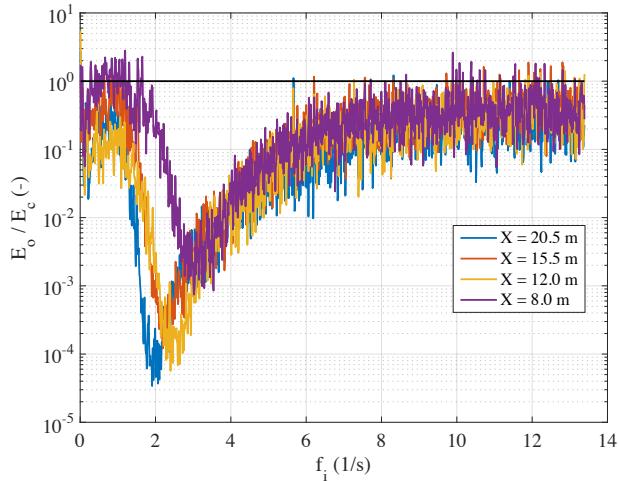


4

5 **Figure 6: Damping of the wave energy for oil-covered water surface. The damping coefficient is evaluated as the ratio $D = E_o / E_c$**
 6 **between the variance density spectrum of the water surface elevation with oil slick (E_o) and in clean water (E_c). The solid black thin**
 7 **line shows the level $E_o = E_c$.**

8 To interpret the data from the experiments we analyze how wave energy depends on fetch. In Figure 7 we
 9 show how the corresponding surface elevation (high-pass filtered above 1 Hz) variance $\sigma^2 = \langle (z(t) - \langle z(t) \rangle)^2 \rangle$
 10 (the angle brackets $\langle \rangle$ denote the ensemble average) varies for the clean water and oil cases. Granted the different
 11 orders of magnitude, it is macroscopic that, while the wave energy in clean water grows with fetch, the opposite is
 12 true (or is suggested to be) with oil. To quantify better the fetch dependence we have fitted a power law

$$\sigma^2 = \alpha X^\beta \quad (8)$$

13 to the water surface variance σ^2 versus fetch X . The values of α and β , respectively, are tabulated in the legend of
 14 Figure 7 (with σ^2 in cm^2 and X in m).

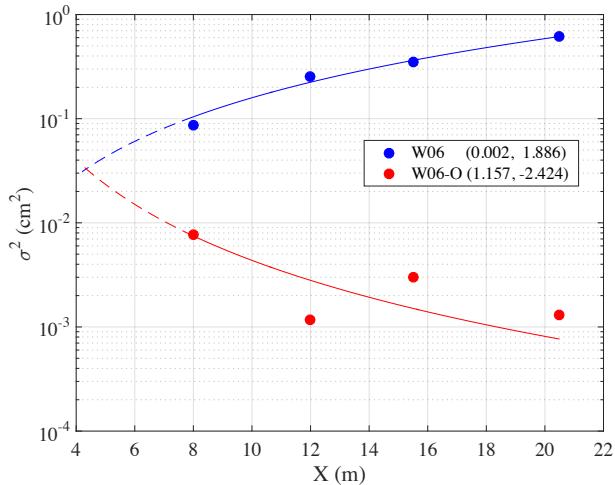


1
2 **Figure 7: Spatial evolution of the water surface elevation variance σ^2 in clean water (W06) and with fish oil slick (W06-O).** The solid
3 lines are the power law-type function $\sigma^2 = \alpha X^\beta$ fitting the observations (in the legend, the coefficient α and β , respectively, are
4 tabulated), while the dashed lines show the laws extended outside the observed data interval.

5 Prolonged in the figure backwards out of the experimental range, the two fitted laws intersect each other
6 around $X = 4$ m. This is the fetch at which oil was introduced into the tank. Note that in the W06-O experiment oil
7 was continuously instilled during the experiment. This was because the wind, acting on the surface oil and creating,
8 as we have seen, a current, tends to push it along the tank faster than the oil tends to distribute uniformly on the
9 surface (with radial speed around 14 cm/s). Indeed this is smaller than the surface speed derived in the previous
10 sub-section for the oil-case. While the continuous, although very limited, instillation of oil during W06-O ensured
11 the presence of oil film from the instillation point onwards, the wind, acting from fetch $X = 0$ m, was pushing the
12 oil away from the first four-metre zone where therefore waves could be generated, hence equal, in both the oil and
13 the no-oil cases. Therefore the “oil” energy we see in Figure 7 at eight-metre fetch is the remnant of the one
14 previously generated and already partially dissipated (between the 4 and 8 m fetches) due to the acting Marangoni
15 forces. Incidentally, this explains one point we had deliberately avoided while discussing the spectra in Figure 5,
16 i.e. why the highest energy in the oily spectra (right panel) is in the first spectrum, i.e. the shortest fetch.

17 The shift along the tank of the surface oil film due to the wind drag is also well illustrated by the results of
18 the experiment W06-O-NI, i.e. when, starting with a layer of oil well distributed on the water surface in the tank,
19 we did not further instill oil during the action of the wind (reference wind speed $U_r = 6$ m/s). The resulting
20 records at $X = 15.5$ m (G3) and 20.5 m (G4) are shown in Figure 8. It is obvious that around 262 sec the effect of
21 oil is beginning to vanish at G3, followed 15-20 s later by a similar result at G4. Note that this does not mean the

1 whole oil was pushed past G3 at 262 sec. Were this the case we should see in the record the already (up to G3
 2 position) generated waves. Rather, the oil edge is getting close enough to let G3 feel the consequences, which are
 3 different from those at G4: in the range [290 s, 300 s] H_s grows from 1.56 cm (G3) to 2.34 cm (G4), conveying the
 4 fact that a longer fetch was progressively made clean by the near-surface water drift. The progressively increasing
 5 space free of oil is also manifest in the record of each probe, where the basic wave period tends to increase with
 6 time.

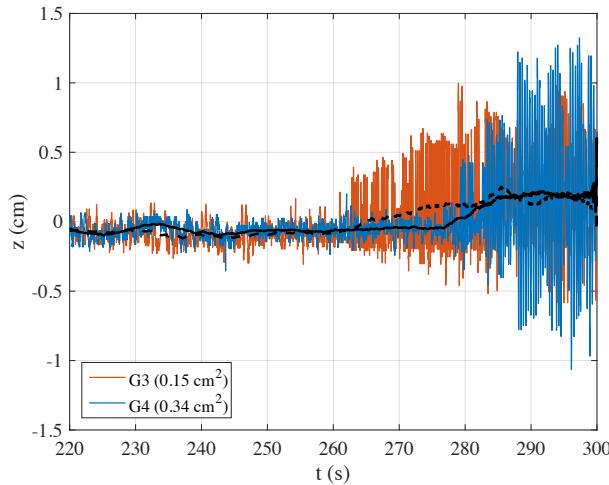

7

8 **Figure 8: Sea surface elevation at probes G3 ($X = 15.5$ m) and G4 ($X = 20.5$ m) for an initially slick-covered surface without oil**
 9 **instillation (experiment W06-O-NI). The dashed and solid black lines show the smoothed elevations (moving average of size 5 s) at**
 10 **G3 and G4, respectively. In the legend, the variance of $z(t)$ within the range of $290 \text{ s} \leq t \leq 300 \text{ s}$ is reported.**

11 In the experiment W06, spectra at the longer fetches (probes G3 and G4, see Figure 5) show two highly
 12 energetic and very close peaks around the frequency $f_a \approx 10$ Hz. As mentioned in section 3.1.1, our interpretation is
 13 that they are originated by the vortex-induced vibrations at the cylindrical holding beams of the probes. Indeed, the
 14 frequency f_v at which vortex shedding takes place is related to the Strouhal number by the following equation:


$$St = \frac{f_v d}{u} \quad (9)$$

15 where St is the dimensionless Strouhal number, f_v is the vortex shedding frequency, d is the diameter of the body,
 16 and u is the flow velocity. The Strouhal number depends on the Reynolds number, but a value of 0.21 is commonly
 17 adopted (Steinman, 1946). Adopting $d = 0.4$ cm (the diameter of the probe's holding beam) and $u = 20$ cm/s, the
 18 vortex frequency is $f_v = 10.5$ Hz, consistent with the experimental evidence. Elaborating this point further, it is
 19 worth noting that similar spectral peaks (as energy and frequency) have been found also during the W06-O

1 experiment. In our interpretation, this evidence supports the fact that the water surface drift was generated by the
2 wind friction also in presence of oil, and that its magnitude is consistent with the one expected in clean water
3 conditions.

3.2 Wind and paddle waves without and with oil


4 The second series of experiments was done adding mechanically-generated paddle waves to the wind-generated
5 ones, both in clean water and in water with fish oil. Within the general purpose of a better understanding of the
6 related air-sea interactions, we had two specific purposes. The first one was to explore the influence of pre-existing
7 relatively long waves (the paddle generated ones) on the local generation of wind waves. The second purpose was
8 how this interference was modified by the presence of fish oil. This second set of experiments (namely W08-P and
9 W08-P-O) was done with 8 m/s reference wind speed. Of course a 6 m/s value would have allowed a more direct
10 comparison with the results obtained without paddle waves (previous section). At the same time, a higher wind
11 speed was useful to better highlight the interaction with the paddle waves. Originally we had planned two full sets
12 of parallel experiments. However, as mentioned in section 2, the strict condition of analyzing only good quality
13 data left us with what is listed in Table 1.

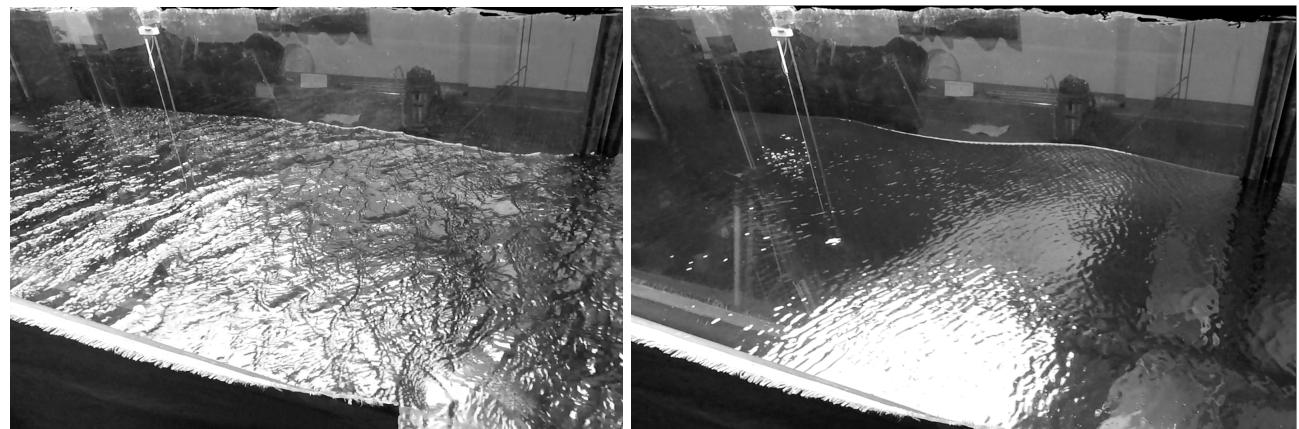

14
15 **Figure 9: Two photographs of the water surface condition at fetch of about 20 m taken without (left panel, experiment W08-P) and**
16 **with oil instillation (right panel, experiment W08-P-O) onto wind-waves (wind blowing from left to right of the pictures at the**
17 **reference wind speed $U_r = 8$ m/s) and irregular paddle-waves. See also the videos available as supplementary material SM2.**

18 In the tank paddle waves were generated as a JONSWAP spectrum with nominal 6.2-cm significant wave
19 height and 1.0-s peak period. On top of this wind waves were generated by a wind blowing at the reference speed
20 of 8 m/s (experiment W08-P). The resulting surface wave field is shown in Figure 9 (left panel), the picture being
21 taken, as Figure 2, close to fetch $X = 20.5$ m. Starting with a qualitative perception from the image (see also the

1 videos available as supplementary material SM2: <https://doi.org/10.5281/zenodo.1434272>), we derive, as expected
 2 from what is reported in the literature, that wind waves grow substantially less than expected in a pure wind sea
 3 (Wu, 1977). For a full comparison we also ran the W08 experiment, with wind blowing at $U_r = 8$ m/s without
 4 paddle waves and in clean water. The comparison between Figure 2 and Figure 9 is even more striking considering
 5 the larger wind speed in Figure 9. Clearly the presence of the paddle waves has an effect. This is a matter of
 6 practical relevance for the cases when in the ocean fresh new waves are generated superimposed on a pre-existing
 7 swell (in this case propagating along the same direction). A more quantified comparison of W08-P versus W08 (i.e.
 8 with versus without paddle, respectively) is provided by the wave spectra shown in Figure 10. Ignoring for the time
 9 being the oily results (experiment W08-P-O), we see that the introduction of the irregular paddle waves (with a
 10 JONSWAP spectrum) cancels the wind wave peak of W08 at about 1.6 Hz. However, the tails of the two spectra
 11 somehow converge above 2.2 Hz. As we will soon see, with paddle waves the conditions did not allow the visual
 12 measurement of current.

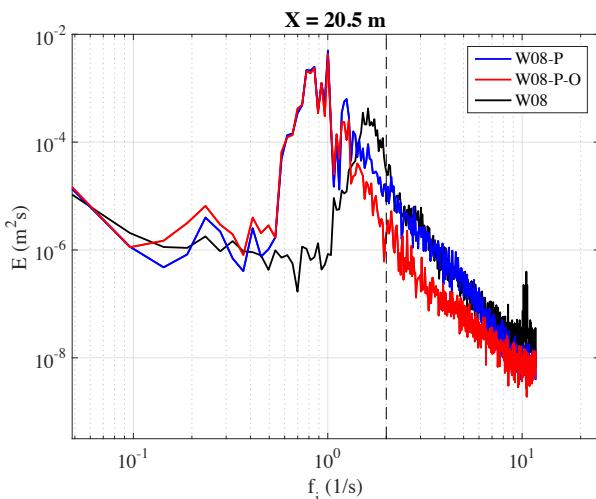


13

14 **Figure 10: Variance density spectrum $E(f_i)$ of the water surface elevation $z(t)$ at fetch $X = 20.5$ m (wave probe G4) in presence of co-**
 15 **existing wind and paddle waves in clean water (W08-P), wind and paddle waves in water with oil (W08-P-O), and wind waves only in**
 16 **clean water (W08). The dashed gray vertical line shows the maximum frequency (2 Hz) produced by the paddle.**


17 We analyze how the overall effect (both without and with oil) varies with fetch. The related spectra are in
 18 depicted in Figure 11. Contrarily to the pure windy cases (experiments W06 and W08), there appear to be no
 19 evident dependence on fetch of the wave energy. Our interpretation is the following. On the one hand the
 20 disappearance of the wind sea energy peak in presence of long waves implies that the wind wave peak does not
 21 develop with fetch. On the other hand, in water with oil, at higher frequencies the balance is between non-linear

1 interactions and Marangoni dissipation, which is only slightly depending on fetch. Note that, as clearly represented
 2 in Figure 12, the attenuation is maximum around 3 Hz (smaller than the resonance frequency) and the maximum
 3 damping of wind wave energy (see for comparison Figure 6) leads to a level of damping (D) two and three orders
 4 of magnitude smaller than with only wind waves (experiments W06). This is the consequence of two parallel facts:
 5 less wind wave energy in presence of paddle waves, and a decreased efficiency of damping by oil film (as evident
 6 comparing the right panels of Figure 2 and Figure 9). These effects have impact also on the short wind waves, as
 7 the damping effect appears to cease at frequencies higher than 9 Hz (Figure 12)

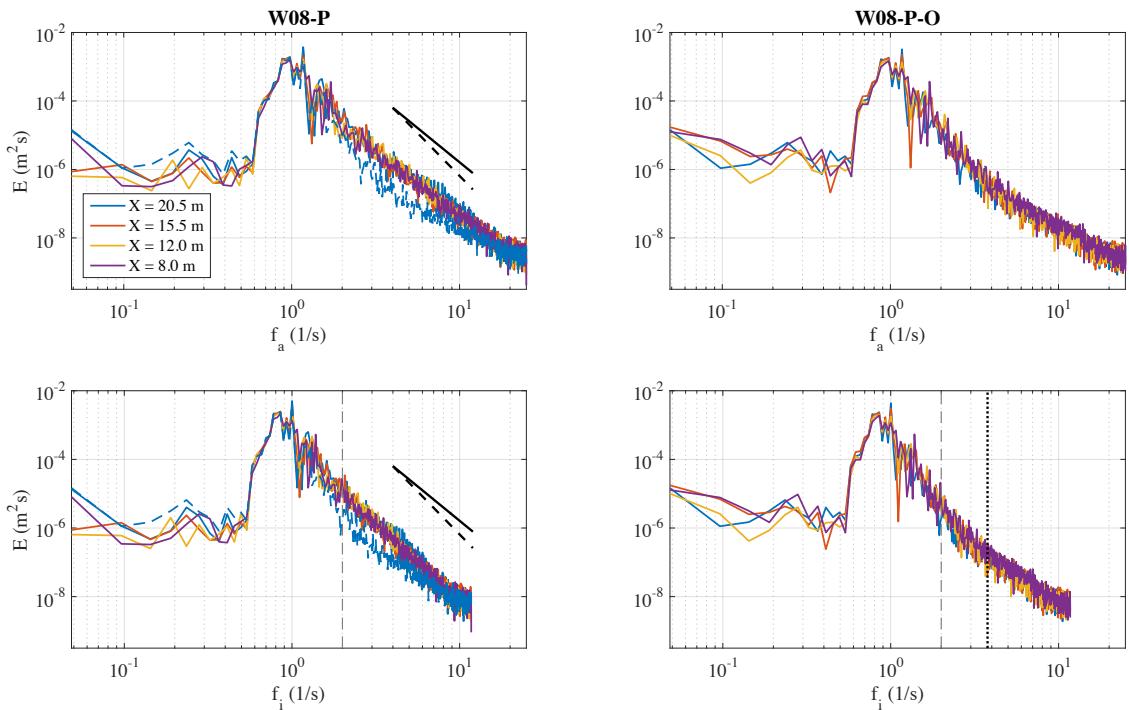

8

9 **Figure 11: Wave energy spectra $E(f_a)$ and $E(f_i)$ of the water surface elevation $z(t)$ at different fetches for the reference wind speed of 8**
 10 **m/s and irregular paddle waves. (left) Clean water experiment W08-P. (right) Water with oil experiment W08-P-O (the spectrum at**
 11 **the fetch $X = 20.5$ m is replicated with a dashed blue line on the left panel). On left panels, the solid and dashed black lines are the**
 12 **reference spectral shape proportional to f^{-4} and f^{-5} , respectively. On bottom panels the dashed gray vertical line shows the maximum**
 13 **frequency (2 Hz) produced by the paddle, and the vertical dotted black line on the bottom-right panel shows the fish oil resonance**
 14 **frequency $f_{res} = \omega_{res}/(2\pi) = 3.77$ Hz.**

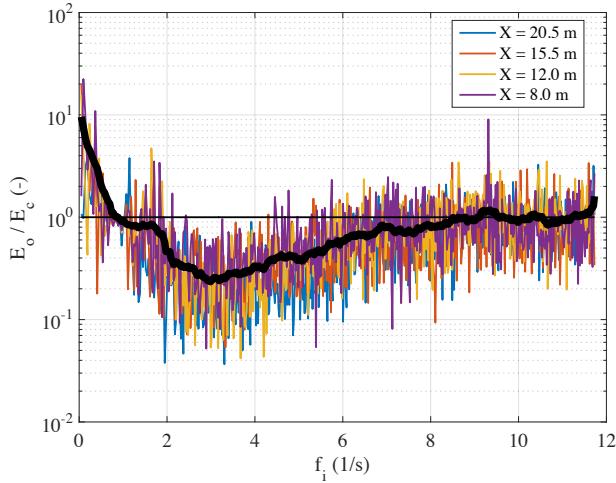


1

2 **Figure 12: Damping of the wave energy for oil-covered water surface.** The damping coefficient is evaluated as the ratio $D = E_o / E_c$
 3 between the variance density spectrum of the water surface elevation with oil slick (E_o ; experiment W08-P-O) and in clean water (E_c ;
 4 experiment W08-P). The solid black thick line is the average shape of the damping coefficient (for the sake of clarity the series is
 5 smoothed with a moving average procedure). The solid black thin line shows the level $E_o = E_c$.

6 Similarly to what was done for the only wind-wave case (Figure 7), we check the small difference of
 7 energy with fetch of the two basic components (paddle and wind waves) of the spectra in clean water and in water
 8 with oil. The differences are small and are visible in Figure 13. Because of the partial superposition of the two
 9 (paddle and wind) frequency ranges, we have computed, for the intrinsic spectra, the surface elevation variance
 10 below 1.3 Hz (PW in Figure 13, dominated by paddle waves) and above 2 Hz (WW in Figure 13, dominated by
 11 wind waves). For the high-frequency part of the wind wave spectrum, in clean water, waves grow slightly with
 12 fetch, gaining 30% energy passing from $X = 8$ m fetch to $X = 20.5$ m. The growth is obviously much smaller than in
 13 absence of swell. The presence of oil (red marker) makes the waves progressively decreasing with fetch (the
 14 coefficient $\beta < 0$), consistently with, and with the same explanation for, the results obtained without paddle waves.

15

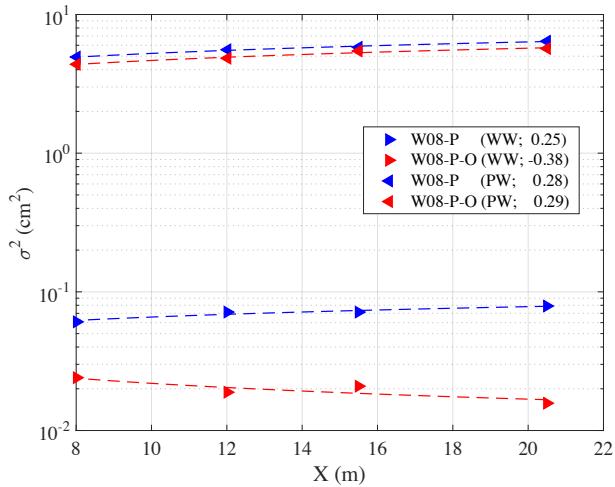

1

2 **Figure 13: Spatial evolution of the water surface elevation variance σ^2 of co-existing wind (WW) and paddle (PW) waves in clean**
 3 **water (W08-P) and with oil slick (W08-P-O). The solid and dashed lines show the power law-type function fitting the experimental**
 4 **data. In the legend the coefficient β of the fitted power law is shown.**

5 The growth of irregular paddle waves under the wind forcing appears to be marginally affected by the
 6 presence of oil (PW markers in Figure 13), similar to the result found by Mitsuyasu and Honda (1986) using
 7 monochromatic paddle waves. We interpret this arguing that the reduction of surface roughness between W08-P
 8 and W08-P-O is not sufficient to change substantially the vertical profile of the turbulent airflow, hence the
 9 generation process acting on long waves. This is confirmed by Figure 14 showing the wind profile with and
 10 without oil. There is only a small difference between the two cases, however the friction velocity is, as expected,
 11 larger in clean water. This implies that the minor disturbances we see in the right panel of Figure 9 suffice for
 12 making the wind feel the surface as rough. Indeed we are here at the limit because the further, almost complete,
 13 wave reduction we see in Figure 2 for the experiment W06-O changes dramatically the wind profile, as already
 14 seen in Figure 3.

15

16

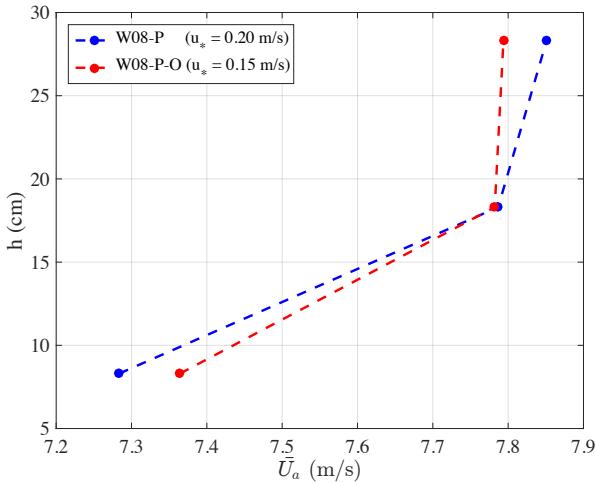


Figure 14: Vertical profile of the wind velocity component \bar{U}_a measured over the water surface at fetch $X = 11.5$ m for co-existing wind- and paddle-generated waves in clean water condition (blue) and for oil-covered surface (red). In the legend, the value of the friction velocity is shown within brackets. Only the value recorded at the three lowest Pitot tubes are shown.

4 Discussion

Our previous description of the general methodology and results has been focused much on the implications of having the water surface covered by a very thin ($\sim 10^{-8}$ m) layer of fish oil. However interesting in itself, it is clear that the main virtue of these experiments has been the opening of new perspectives on the physics of air-sea interactions. We discuss here the main suggestions and ideas derived from our results.

- The different wind profile and wave growth without and with oil clearly show that the stress felt by the atmosphere is, as anticipated by Janssen (1991), the sum of the friction stress and the input to waves. Lacking the latter, the atmospheric stress reduces to the purely frictional one. This has implications also for circulation modeling where quite often the wave intermediate role (wind input to waves followed by wave input to current via breaking) is by-passed by an artificially inflated surface friction to current. Janssen (1991) added wave growth to the stress felt by the atmosphere. McWilliams and Restrepo (1999) showed how the general global circulation could be obtained also driving it only with breaking waves. Our experiments have shown what τ_a reduces to if waves do not appear. We can argue about a possibly increased friction drag in presence of a rough surface, but the general principle remains.
- Especially with young, hence relatively slow, waves it is essential to consider generation with respect to the surface current. In our case, lacking any instrument to measure current, and in particular its vertical profile, we

1 have used two independent methods based on video documentation to get an estimate of the surface current
2 drift. The two approaches provided similar results, consistent with the one derived from the wind speed and
3 similar conditions in the literature. Lacking any data on the current vertical profile, and supported also by the
4 recirculation characteristics of the wave tank, we made the blunt assumption of a vertically uniform current.
5 This is a first order approximation, that we consider acceptable in our case because the related discussion
6 concerns only very short waves. In any case, more complete experiments are planned for the near future.

7 – We have found it interesting to look at how the water surface reacts and evolves under the action of an
8 impulsive wind forcing. For this first analysis of the obtained data, we have limited ourselves to the steady,
9 fetch-limited conditions. This subject takes us to a very short discussion on the generation mechanism(s) of the
10 earliest waves. In this respect, the spectral approach to wind wave modeling began with the study by Pierson et
11 al. (1955), followed by the two parallel and independent, but complementary, papers by Phillips (1957) and
12 Miles (1957), and the definition of the energy balance equation by Gelci et al. (1957). While the Miles'
13 mechanism, refined by Janssen (1991), provides the bulk of the input to waves, we still need to trigger the first
14 wavelets on which Miles, and non-linear interactions, can then act. Two processes compete for this first stage:
15 the just mentioned one by Phillips, associated to assumed pressure oscillations moving with the wind,
16 supported also by the recent paper by Zavadsky and Shemer (2017), and a sort of Kelvin-Helmoltz instability
17 (Kawai, 1979) due to the strong vertical shear in the surface water layer following the initial action by wind.
18 The matter is not relevant for practical purposes because these initial stages are usually parameterized or
19 bypassed in wave modeling in a pragmatic way. We know these wavelets appear and their exact dimensions are
20 irrelevant for the following evolution of the actual field. However, our experiments provide a small piece of
21 information. The Phillips' mechanism is supposed to act on any wavelength, independently of the other ones.
22 We argue that in the oily experiment, granted the dissipation at the wavelet scale due to the Marangoni effect,
23 nothing would impede the Phillips' mechanism to act on the longer waves. However, we found no evidence of
24 energy in the corresponding wave components.

25 – With short wind and long paddle waves, the presence of oil still reduces wind-wave generation, but there is
26 more wind-wave energy than with only wind. Therefore the presence of a swell reduces the effectiveness of the
27 oil in impeding local generation. We hypothesize this as mainly due to the long wave orbital motion that

1 detunes the resonance conditions between Marangoni waves and gravity-capillary waves. Moreover, this
2 motion continuously disrupts the continuity of the oil layer, hence the effectiveness of the Marangoni forces.

3 **5 Conclusions and summary**

4 With the help of an experimental facility, we have studied the influence of a very thin layer of fish oil on wind and
5 paddle waves as well as on the parameters of the lowest airflow layer. Measurements of sea surface elevation at
6 different fetches and of wind speed were carried out in both clean water and in water with fish oil producing a
7 viscoelastic film on the surface. The damping of short gravity-capillary waves by surfactants appears a convenient
8 condition to study, to a large extent, the processes of interaction between the water body and the atmosphere. The
9 aim of the present study is thus to evaluate the influence of the fish oil film on the growth of wind and paddle
10 waves and on the air-water interaction process. Taking this viewpoint, the principal conclusions of our study can be
11 summarized as follows:

12 – Marangoni forces, associated to the presence of the fish oil, quickly dissipate and impede the formation of the
13 first wavelets, hence, in a laboratory, the growth of any wind sea. As it is generally agreed, this dissipation at
14 short wavelengths leads to an intensified energy transfer via non-linear interactions from the bulk of the
15 spectrum, in so doing not only smoothing, but also partly calming the sea. In the fish-oil covered wave tank,
16 the powerful suppression of the first wavelets leaves the airflow vertical profile unaffected by the wave field,
17 so that the Miles-Janssen wave growth mechanism is not triggered.

18 – Our results show the efficacy of the fish oil in suppressing the wave generation by wind. Indeed, in the
19 experiments in a wind-wave tank contaminated by non-animal surfactants, Hühnerfuss et al. (1981) found that
20 the peak of the spectra is shifted towards higher frequency in reference to clean water. However, a wind-wave
21 spectrum was still present in their tests, whilst we have found that, using fish oil in the wind-only condition
22 (reference wind speed of 6 m/s), the wave field does not grow from the rest condition, leading to a strong
23 modification of the airflow vertical profile.

24 – The experiment with wind-wave only in water with fish oil (experiment W06-O) gave us the unique
25 opportunity to investigate (albeit preliminarily) the interactions at the air-water interface in absence of surface
26 waves. Clearly, the stress exerted in that case by the airflow is smaller than the one in clean water (when the
27 wave field regularly develops) and the water current is determined by the wind shear only, so that $\tau_w \approx \tau_a$.

1 This condition is expected to be different from the one obtained for fully developed waves (in clean water),
2 when one should find that in Eq. (7) the momentum flux into the water column τ_w should become the
3 atmospheric stress τ_a as the wave field reaches equilibrium (see ECMWF, 2017). For instance, the water
4 current vertical profile below the surface is expected to be different in clean water and in water with oil. In this
5 respect, new experiments are already planned that will investigate also the drift current distribution beneath the
6 water surface for an oil-covered water surface.

7 - The growth of paddle-generated long waves seems to be little affected by the roughness of short waves.
8 Provided a minimal background of very short waves (in practice surface roughness) is present, the growth of
9 paddle waves under the action of wind is largely independent on the background level, a fact we ascribe to the
10 similar distortion of the wind profile in the two cases.

11 As mentioned in the text, we have barely touched the surface of the subject. Wave generation and dissipation, and
12 more general atmosphere and sea dynamic interaction, are still to be fully explored. The approach we followed,
13 experiments in a wind wave tank without and with oil on the surface, offers new possibilities for digging into this
14 old, but still fruitful, field.

15 **Appendix A: The Marangoni wave damping effect**

16 The physics of the Marangoni effect is well understood, and it is generally agreed that the gravity-capillary wave
17 energy is damped by a surfactant by the following mechanism. Immediately after a wave field enters a surfactant
18 patch, the Marangoni effect due to the viscoelastic film on the water surface increases viscous dissipation of short
19 wave energy at specific frequencies. This is caused by an additional dissipation in the surface boundary layer.
20 Indeed a shear stress in the boundary layer is required to balance the stress due to the surface tension gradients
21 originated by the non uniform concentration of the surface viscoelastic film (alternatively contracted and expanded
22 due to the passage of a wave). This gives rise to additional longitudinal waves in the boundary layer superimposed
23 on the existing surface waves that are thus damped by a resonance-type mechanism. The dissipative spectral sink
24 (the so-called Marangoni resonance region) is at frequencies between 3 Hz and 8 Hz, the scale of the maximum
25 damping depending on the dilatational modulus of the surfactant (Alpers and Hühnerfuss, 1989; Fiscella et al.,
26 1985). The resonant angular frequency ω_{res} for the Marangoni-force wave damping is given by

$$\omega_{\text{res}} = \left\{ \frac{[\cos(\pi/8)]^4 g^4 (\eta \rho_w)}{\varepsilon^2} \right\}^{\frac{1}{5}} \text{ (rad/s)} \quad (10)$$

1 where g (m/s^2) is the gravity acceleration, ρ_w (kg/m^3) the clean water density, η (Ns/m^2) the clean water dynamic
 2 viscosity, and ε (N/m) denotes the dilatational modulus of the surface film. As stated by Eq. (10), the larger the
 3 modules ε the longer the damped waves. The maximum damping of gravity-capillary waves is attained at a
 4 frequency lower than ω_{res} (the Marangoni wave is a strongly damped wave) and the width of the resonant damping
 5 is quite broad (the half-power width is in the order from 1 to 2 Hz; Alpers and Hühnerfuss, 1989).

6 In a more formal approach, the description of water surface gravity waves follows generally a statistical
 7 approach by means of the development of the wave elevation variance spectrum $E = E(k, \theta, \mathbf{x}, t)$ in the physical
 8 space \mathbf{x} and time t (k is the wavenumber and θ the propagation direction), its evolution governed by the energy
 9 balance equation (Gelci et al., 1957). In deep waters, it reads

$$\frac{\partial N}{\partial t} + \frac{\partial N}{\partial \mathbf{x}} \cdot (\dot{\mathbf{x}}N) = S_{\text{in}} + S_{\text{nl}} + S_{\text{di}} \quad (11)$$

10 where $N = E / \omega$ is the wave action density spectrum with ω the intrinsic angular frequency. Furthermore,
 11 $\dot{\mathbf{x}} = \mathbf{c}_g + \mathbf{U}$ with \mathbf{c}_g the wave group velocity and \mathbf{U} an appropriate current. The right hand side of Eq. (11)
 12 represents the net effect of sources and sinks for the spectrum (Komen et al., 1994): S_{in} is the rate of energy
 13 transferred from the wind to the wave field, S_{nl} is the rate of nonlinear energy transfer among wave components
 14 with different wavenumber, and $S_{\text{di}} = S_{\text{di},b} + S_{\text{di},v}$ is the rate of energy dissipation due to breaking ($S_{\text{di},b}$) and viscous
 15 forces ($S_{\text{di},v}$).

16 In our experiments the observations dealt with in this paper are the ones collected at steady state, so that
 17 the spectrum at any fetch is determined by the upwind evolution of the source functions S_{in} , S_{nl} and S_{di} , that is

$$N = \int_0^x \left[(c_g + U)^{-1} (S_{\text{in}} + S_{\text{nl}} + S_{\text{di}}) \right] dx \quad (12)$$

18 where, with good approximation, we have neglected the cross-tank wave energy evolution. The velocities \mathbf{c}_g and \mathbf{U}
 19 are also, but very weakly, fetch dependent. The balance in Eq. (12) indicates that any modification of the wave
 20 energy may and must be caused by changes in the rate of wind input, dissipation, or/and nonlinear transfer.

1 In presence of oil, all three source functions undergo a change compared to the clean water condition. Indeed,
2 the rapid suppression of short waves by Marangoni forces reduces the water surface mean slope, which leads to a
3 change of the wind vertical profile and rapid decrease of the momentum flux from the wind to the wave field (see,
4 e.g., Mitsuyasu and Honda, 1986). Those two effects combined produce a change of the shape of the wave
5 spectrum in the equilibrium range, which leads, via nonlinear wave-wave interaction (Hasselmann, 1962), to a slow
6 leakage (but fast compared to the pure viscous one; Alpers and Hühnerfuss, 1989) at wavelengths longer than those
7 at which the Marangoni forces are effective

8 Given the possible variability of the surfactant density on the water surface, it is natural to wonder about the
9 related sensitivity of the effect on waves. Analyzing the wind-wave tank experiments with surfactants (sodium
10 lauryl sulfate) presented by Mitsuyasu and Honda (1986), we can distinguish two different regimes for wave
11 attenuation, which correspond to weak and strong wave damping, respectively. Firstly, for small surfactant
12 concentrations (i.e. weak damping), the peak frequency of the wind-wave spectrum in presence of films is shifted
13 to higher frequencies in reference to the peak frequency of clean water (in other words waves develop more
14 slowly). However, spectra preserve u_* -similarity, and the new spectral shape was ascribed mainly to the decrease
15 of the wind stress: the surfactants smooth the surface and act reducing the wind stress, therefore the waves grow
16 less. We interpret this result assuming that for low surfactant concentrations the effectiveness of the Marangoni
17 damping is small (i.e. the water surface is not fully covered by an uniform film), but with a partially reduced
18 aerodynamic roughness. On the contrary, for the highest concentration (hence with a strong damping) the similarity
19 no longer holds, and most of the energy around the peak is lost (the maximum energy is at a frequency smaller than
20 the one in clean water; see also Figure 5 and Figure 6).

21 A question about Marangoni forces concerns the maximum wind speed for which they are expected to keep
22 their damping efficiency. In early studies, the disappearance of the Marangoni damping was observed by Mitsuyasu
23 and Honda (1986) for wind speed larger than a critical value, that those authors found to be 12.5 m/s. A possible
24 explanation is provided in the study by Alpers and Hühnerfuss (1989), who argued that above a certain friction
25 velocity (around 0.5 m/s) the Marangoni dip is filled in owing to a large flux of wave energy into the Marangoni
26 resonance region by nonlinear wave-wave interactions. In addition, for stronger wind stresses the viscoelastic film
27 becomes more mixed with the underlying clean water bulk (the film is “washed down”), so that the Marangoni
28 damping is strongly attenuated (see also Feindt, 1985). However, these conclusions seem not to be fully consistent

1 with the recent analysis made by Cox et al. (2017) of the saving in 1883 of the crew of a sinking vessel by the ship
2 *Martha Cobb* under very severe stormy conditions (wind speed around 20 m/s). In that occasion 19 liters of fish oil
3 were dribbled into the sea and the log records report what, after a 20-minute delay, was defined as a “magic effect”,
4 i.e. that the water surface smoothed and breakers disappeared around the vessel, allowing the crew to be saved
5 using a small open deck dingy. Cox et al. (2017) estimated that after 20 minutes the surface covered by the oil film
6 was about 0.4 km^2 , hence, the average oil thickness was about $5 \times 10^{-8} \text{ m}$. In those conditions, therefore, the
7 thickness was comparable to that used in our experiments in the tank and, in spite of the high wind speed, the wave
8 damping (with practical cancelling of wave breaking) was still effective.


9 **Appendix B: Surface current drift estimate using optical flow**

10 As it is specified in Section 3.1.1, tiny bubbles moving on the surface along the tank, and visible in the 1920x1080
11 pixel images captured at 60 Hz by a video-camera placed outside the tank close to prove G4, made it possible to
12 have an estimate of the water surface current. The probe’s two vertical wires, whose measures have been accurately
13 determined, were used to map visual features from the image space (in pixels) to the tank surface space (in meters).
14 To ease the computation, we manually defined a quadrilateral area in the image and computed the homographic
15 transformation between the quadrilateral space to a normalized rectangular space of size 512x512 pixels. To
16 account for the possible uneven illumination along the sequence, each image was normalized so that the intensity
17 values have zero mean and unitary standard deviation. Due to the optical characteristics of the water, bubbles are
18 not the only visual features present in the frames. Indeed, visual clutter mostly due to reflections makes it more
19 complex to reliably track the bubbles during the whole sequence. Since the cameras were firmly placed on a tripod
20 during the acquisition, and light conditions were mostly controlled, the clutter appearance remains quite stable
21 among the frames, with slight fluctuations due to the small waves and the automatic exposure adjustments of the
22 camera.

23 Therefore, we performed a simple background subtraction by computing the squared difference between
24 each frame and the frame obtained by averaging the intensity values of the previous 3 frames. To remove the high-
25 frequency noise and artifacts caused by video compression, we blurred the background-subtracted image with a
26 3x3 Gaussian kernel and applied a threshold of 1.8 to obtain binary images. From the binary image of each frame,
27 we extracted the location of each particle by using the function *goodFeaturesToTrack()* provided by the OpenCV
28 Computer Vision Library (Bradski and Kaehler, 2008). We specified 2000 max corners, a quality level of 0.08, a

1 minimum distance between features of 3 pixels and a block size of 9x9 pixels. Then, we computed the sparse
2 optical flow with respect to the subsequent frame at the location of each particle using the iterative Lucas-Kanade
3 method with pyramids provided by OpenCV. We used a 15x15 pixels window for the matching and a pyramid
4 depth of 5 levels. The computed optical flow gives the amount of movement performed by each tracked particle
5 between each frame (Figure 15). By knowing the mapping between pixels and tank metric space, and the camera
6 frame rate, we could estimate the speed (in m/s) of each particle. So, we transformed particle locations and
7 movement vectors back to the original image space by inverting the homography.

8

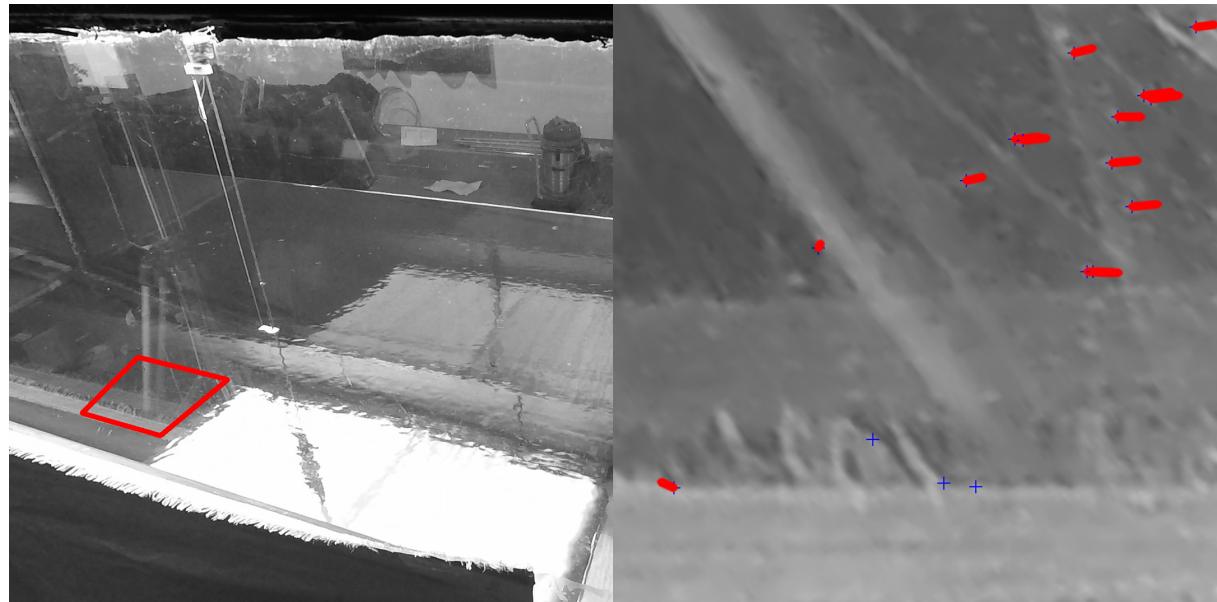

9

10 **Figure 15: Estimate of surface current speed by optical flow during experiment W06-O. (left)** Bounded by a red polygon, the surface
11 area used for the determination of the flow. **(right)** Example of detected particles with their corresponding movement (wind blowing
12 from left to right of the pictures).

13 **Supplementary Material (Videos)**

14 1. Supplementary material SM1 available at <https://doi.org/10.5281/zenodo.1434262>.
15 2. Supplementary material SM2 available at <https://doi.org/10.5281/zenodo.1434272>.

16 **Author contributions.** All authors have contributed to the writing of the paper. Experiments were planned
17 by LC, FQ, and AB, and executed by all authors. Data analysis and interpretation were performed by AB with the
18 help of LC, FB, and SJ.

19 **Competing interests.** The authors declare that they have no conflict of interest.

1 **Acknowledgements**

2 Authors gratefully acknowledge the funding from the Flagship Project RITMARE - The Italian Research for the
3 Sea - coordinated by the Italian National Research Council and funded by the Italian Ministry of Education,
4 University and Research within the National Research Program 201115. The authors are pleased to acknowledge
5 useful discussions with P.A.E.M. Janssen, Norden Huang, Jean-Raymond Bidlot, and Francesco Barbariol. Luigi
6 Cavalieri has been partially supported by the EU contract 730030 call H2020-EO-20116 ‘CEASELESS’. Fanqli
7 Qiao was supported by the international cooperation project on the China-Australia Research Center for Maritime
8 Engineering of Ministry of Science and Technology, China under grant 2016YFE0101400, and the international
9 cooperation project of Indo-Pacific ocean environment variation and air-sea interaction under Grant GASI-
10 IPOVAI-05.

11

12 **References**

13 Adrian, R. J.: Particle-Imaging Techniques For Experimental Fluid Mechanics, *Annu. Rev. Fluid Mech.*,
14 23, 261–304, 1991.

15 Alpers, W. and Hühnerfuss, H.: The damping of ocean waves by surface films: A new look at an old
16 problem, *J. Geophys. Res.*, 94(C5), 6251–6265, doi:10.1029/JC094iC05p06251, 1989.

17 Benetazzo, A., Bergamasco, F., Yoo, J., Cavalieri, L., Kim, S. S., Bertotti, L., Barbariol, F. and Shim, J.
18 S.: Characterizing the signature of a spatio-temporal wind wave field, *Ocean Model.*, 129, 104–123,
19 doi:10.1016/j.ocemod.2018.06.007, 2018.

20 Bradski, G. and Kaehler, A.: *Learning OpenCV: Computer Vision with the OpenCV Library*, edited by
21 Or. M. Inc., 2008.

22 Chen, G. and Belcher, S. E.: Effects of long waves on wind-generated waves, *J. Phys. Oceanogr.*, 30(9),
23 2246–2256, 2000.

24 Cini, R., Lombardini, P. P. and H: Remote sensing of marine slicks utilizing their influence on wave
25 spectra, *Int. J. Remote Sens.*, 4(1), 101–110, 1983.

26 Cox, C. S., Zhang, X. and Duda, T. F.: Suppressing breakers with polar oil films: Using an epic sea

1 rescue to model wave energy budgets, *Geophys. Res. Lett.*, 44, 1414–1421, doi:10.1002/2016GL071505.,
2 2017.

3 Donelan, M. A.: The effect of swell on the growth of wind waves, *Johns Hopkins APL Tech. Dig.*, 8(1),
4 18–23, doi:10.1016/S0422-9894(08)70110-7, 1987.

5 Donelan, M. A., Haus, B. K., Plant, W. J. and Troianowski, O.: Modulation of short wind waves by long
6 waves, *J. Geophys. Res.*, 115(C10003), 1–12, doi:10.1029/2009JC005794, 2010.

7 ECMWF: PART VII: ECMWF WAVE MODEL, in IFS Documentation CY43R3, p. 99, ECMWF.
8 [online] Available from: <https://www.ecmwf.int/en/elibrary/17739-part-vii-ecmwf-wave-model>, 2017.

9 Ermakov, S. A., Panchenko, A. R. and Talipova, T. G.: Damping of High-frequency Wind Waves by
10 Artificial Surface-active Films., *Izv. Akad. Nauk SSSR. Fiz. Atmos. i okeana*, 21, 54–58, 1985.

11 Ermakov, S. A., Zujkova, A. M., Panchenko, A. R., Salashin, S. G., Talipova, T. G. and Titov, T. I.:
12 Surface film effect on short wind waves, *Dyn. Atmos. Ocean.*, 10, 31–50, 1986.

13 Fairall, C. W., Bradley, E. F., Hare, J. E., Grachev, A. A. and Edson, J. B.: Bulk Parameterization of Air–
14 Sea Fluxes: Updates and Verification for the COARE Algorithm, *J. Phys. Oceanogr.*, 16(4), 571–591,
15 2003.

16 Feindt, F.: Radar-Rückstreuexperimentteam Wind-Wellen-Kanal bei sauberer und filmbedeckter
17 Wasseroberfläche im X-Band (9.8 GHz), Ph.D.thesis, Univ.of Hamburg, Federal Republic of Germany.,
18 1985.

19 Fiscella, B., Lombardini, P. P., Trivero, P. and Cini, R.: Ripple Damping on Water Surface Covered by a
20 Spreading Film : Theory and Experiment, *Nuovo Cim.*, 8(5), 491–500, 1985.

21 Foda, M. and Cox, C. S.: The spreading of thin liquid films on a water-air interface, *J. Fluid Mech.*, 101,
22 33–51, 1980.

23 Gelci, R., Cazalé, J. and Vassal, J.: Prévision de la houle. La méthode des densités spectroangulaires,
24 Bull. Inform. Com. Cent. Ocean. D'Etude Cotes, (9), 416–435, 1957.

25 Hasselmann, K.: On the non-linear energy transfer in a gravity-wave spectrum Part 1. General theory, *J.*
26 *Fluid Mech.*, 12(4), 481–500, doi:10.1017/S0022112062000373, 1962.

1 Hühnerfuss, H., Alpers, W., Lange, P. . and Walter, W.: Attenuation of wind waves by artificial surface
2 films of different chemical structure, *Geophys. Res. Lett.*, 8(11), 1184–1186, 1981.

3 Hühnerfuss, H., Alpers, W., Garrett, D., Lange, P. . and Stolte, S.: Attenuation of capillary and gravity
4 waves at sea by monomolecular organic surface films, *J. Geophys. Res.*, 88, 9809–9816, 1983.

5 Hwang, P. A., García-Nava, H., Ocampo-Torres, F. J., Hwang, P. A., García-Nava, H. and Ocampo-
6 Torres, F. J.: Observations of Wind Wave Development in Mixed Seas and Unsteady Wind Forcing, *J.*
7 *Phys. Oceanogr.*, 41(12), 2343–2362, doi:10.1175/JPO-D-11-044.1, 2011.

8 Janssen, P.: Quasi-linear Theory of Wind-Wave Generation Applied to Wave Forecasting, *J. Phys.*
9 *Oceanogr.*, 21(11), 1631–1672, 1991.

10 Janssen, P. A. E. M.: Quasilinear approximation for the spectrum of wind-generated water waves, *J. Fluid*
11 *Mech.*, 117, 493–506, 1982.

12 Janssen, P. A. E. M. and Bidlot, J.-R.: Progress in in Operational Operational Wave Wave Forecasting,
13 *Procedia IUTAM*, 26, 14–29, 2018.

14 Kawai, S.: Generation of initial wavelets by instability of a coupled shear flow and their evolution to
15 wind waves, *J. Fluid Mech.*, 93(4), 661–703, doi:10.1017/S002211207900197X, 1979.

16 Kirby, J. T. and Chen, T. M.: Surface-waves on vertically sheared flows: approximate dispersion
17 relations., *J. Geophys. Res. Ocean.*, 94(C1), 1013–1027, 1989.

18 Komen, G. J., Cavaleri, L., M. Donelan, K. H., Hasselmann, S. and Janssen, P. A. E. M.: Dynamics and
19 Modelling of Ocean Waves., edited by Cambridge University Press, Cambridge University Press., 1994.

20 Liberzon, D. and Shemer, L. E. V: Experimental study of the initial stages of wind waves ' spatial
21 evolution, *J. Fluid Mech.*, 681, 462–498, doi:10.1017/jfm.2011.208, 2011.

22 Lindgren, G., Rychlik, I. and Prevosto, M.: Stochastic Doppler shift and encountered wave period
23 distributions in Gaussian waves, *Ocean Eng.*, 26, 507–518, 1999.

24 Longuet-Higgins, M. S.: The effect of nonlinearities on statistical distribution in the theory of sea waves,
25 *J. Fluid Mech.*, 17(3), 459–480, 1963.

26 Longuet-Higgins, M. S. and Stewart, R. H.: Changes in the form of short gravity waves on long waves

1 and tidal currents, *J. Fluid Mech.*, 8(4), 565–583, 1960.

2 Marangoni, C.: Sul principio della viscosità superficiale dei liquidi stabili, *Nuovo Cimento*, Ser. 2, 5/6,
3 239–273, 1872.

4 McWilliams, J. C. and Restrepo, J. M.: The Wave-Driven Ocean Circulation, *J. Phys. Oceanogr.*, 29(10),
5 2523–2540, doi:10.1175/1520-0485(1999)029<2523:TWDOC>2.0.CO;2, 1999.

6 Miles, J.: Surface-wave generation revisited, *J. Fluid Mech.*, 256, 427–441, 1993.

7 Miles, J. W.: On generation of surface waves by shear flows, *J. Fluid Mech.*, 3, 185–204, 1957.

8 Mitsuyasu, H.: Interactions between water waves and winds (1). *Rep. Research Inst. Appl. Mech.*
9 (RIAM), Kyushu Univ. 14 (48),, 1966.

10 Mitsuyasu, H.: Reminiscences on the study of wind waves, *Proc. Jpn. Acad., Ser. B*, 91(4), 109–130,
11 2015.

12 Mitsuyasu, H. and Honda, T.: The effects of surfactant on certain air-sea interaction phenomena, in *Wave*
13 *Dynamics and Radio Probing of the Ocean Surface*, pp. 41–57, Held May 13-20, 1981, in Miami, Florida.
14 Edited by O. M. Phillips and K. Hasselmann, pp. 41-57, Plenum, New York,, 1986.

15 Peirson, W. L.: Measurement of surface velocities and shears at a wavy air-water interface using particle
16 image velocimetry, *Exp. Fluids*, 23, 427–437, 1997.

17 Phillips, O. M.: On the generation of waves by turbulent wind, *J. Fluid Mech.*, 2, 417–445, 1957.

18 Phillips, O. M. and Banner, M. L.: Wave breaking in the presence of wind drift and swell., *J. Fluid*
19 *Mech.*, 66, 625–640, 1974.

20 Pierson, W. J., Neumann, G. and James, R. W.: *Practical Methods for Observing and Forecasting Ocean*
21 *Waves by Means of Wave Spectra and Statistics*, Washington, U.S. Navy Hydrogr. Off. Publ. No. 603,
22 284 pp, 1955.

23 Steinman, D. B.: Problems of aerodynamic and hydrodynamic stability, in *3rd Hydrulic Conference*.
24 *Studies in Engineering*, Bull. No. 31., 1946.

25 Stewart, R. H. and Joy, W. J.: HF radio measurements of surface currents, *Deep. Res.*, 21, 1039–1049,
26 1974.

1 Welch, P. D.: The Use of Fast Fourier Transform for the Estimation of Power Spectra: A Method Based
2 on Time Averaging Over Short, Modified Periodograms, IEEE Trans. Audio Electroacoust., AI-15(2),
3 doi:10.1109/TAU.1967.1161901, 1967.

4 Wu, J.: Wind-induced drift currents, J. fluid, 6(1), 49–70, 1975.

5 Wu, J.: Effects of long waves on wind boundary layer and on ripple slope statistics, J. Geophys. Res.,
6 82(9), 1359–1362, doi:10.1029/JC082i009p01359, 1977.

7 Zavadsky, A. and Shemer, L.: Water waves excited by near-impulsive wind forcing, J. Fluid Mech., 828,
8 459–495, doi:10.1017/jfm.2017.521, 2017.

9